

July 2019

Pilot/Escort State by State Update



**Utilized in the UDOT and CDOT
Pilot/Escort Driver
Certification Program**

**PDF Digital Version Available at
www.uspilotcar.com**

Copyright 2019
Published July 2019
www.uspilotcar.com

RSA Network Inc.
1226 W. S. Jordan Parkway
Suite B
South Jordan, UT 84095
801-838-8999 Phone
801-838-8167 Fax

Definitions

GVW – Gross Vehicle Weight
GVWR – Gross Vehicle Weight rating
AAMVA – American Association of Motor Vehicle Administrators
CVSA – Commercial Vehicle Safety Alliance
FHWA – Federal Highway Administration
SC&RA – The Specialized Carriers & Rigging Association
MUTCD – Manual on uniform traffic control devices
FMCSA – Federal Motor Carrier Safety Administration

Links

The federal GVW issue can be found on <http://www.uspilotcar.com/390.5%20definitions.pdf>

Utah DOT Pilot/Escort Inspection form can be found on <http://www.uspilotcar.com/udot%20mcd%20form%203%20pilot-escort%20vehicle%20inspection%20checklist%203%2001%2008.pdf>

Utah Highway Patrol Inspection Form can be found on <http://www.uspilotcar.com/highway%20patrol%20inspection%20form.pdf>

Post trip evaluation form can be found on <http://www.uspilotcar.com/post%20trip%20form%20june%202006.pdf>

Tillerman issue can be found on <http://www.uspilotcar.com/390.5%20guidance.pdf>

CMV Markings can be found on <http://www.uspilotcar.com/390.21%20marking%20of%20cmv.pdf>

CMV insurance can be found on <http://www.uspilotcar.com/387.9.pdf>

IMPORTANT

This publication is designed to provide accurate and authoritative information about the subject covered. It is sold and published with the understanding that the author is not engaged in rendering legal, accounting or other professional services. If Legal or other advice is required the services of an appropriate professional should be sought.

Information contained in this publication has been carefully compiled from sources believed to be reliable, but the accuracy of the information is not guaranteed.

The Author specifically disclaims any personal liability, loss or risk incurred as consequence of the use, either directly or indirectly, or any information or advice given in this report.

All rights are reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopy, recording or any other information storage and retrieval system, without the written permission of the Author.

Reproduction or translation of any part of this work, beyond that permitted by Sections 107/108 of the 1976 United States Copyright Act, without the permission of the copyright owner is unlawful.

Requests for permission or further information should be addressed to the attention of the Author.

Library of Congress

Sorenson, Randall D.

Escort Vehicle Training Manual

PA 1-621-756

Copyright 2009/10 All Rights Reserved

Randall D. Sorenson Author

2019

UDOT Pilot/Escort Course State by State Update

The information contained in this supplemental manual was extracted from each individual state's rules and regulations. At the date of this printing, this information was as accurate as possible. However, due to the very nature of the governmental system, these noted rules and regulations could change at any time. We cannot be held responsible for any changes that have been made. We will be updating this information twice a year once in January and again in July.

To obtain updates in the future, contact:

RSA Network Inc.
1226 W. South Jordan Parkway
Suite B
South Jordan, UT 84095

Copyright 2017

STATE AND FEDERAL OFFICES FOR OVERSIZE-OVERDIMENSIONAL PERMIT OFFICES

Information provided within, was compiled in July 2019

The information provided within this document can change at any time. Each State has the ability to change their Rules and Regulations at any time, it is recommended that if specific information is required, that you should contact the agency directly.

Alabama

Alabama Department of Transportation
1409 Coliseum Boulevard
Montgomery, AL 36110
334-242-6358

Site Location:

<https://www.dot.state.al.us>

Pilot Car Info:

https://www.dot.state.al.us/maweb/pdf/Permits/OSnOW_RulesAndRegulations.pdf

Alaska

Alaska Department of Transportation
11900 Industry Way, Building M
Anchorage, Alaska 99515
(907)365-1210

(907)365-1220 Fax

State Location:

<http://www.dot.state.ak.us/>

Pilot Car Info:

http://dot.alaska.gov/mscve/webdocs/PermitsManual_rev_2013.04.12.pdf

Alberta

Alberta Infrastructure and Transportation
Twin Atria Building
4999-98 Avenue
Edmonton, Alberta T6B 2X3
1-780-427-2731 or 1-780-466-3166

State Location:

<http://www.transportation.alberta.ca/>

Pilot Car Info:

<http://www.transportation.alberta.ca/Content/docType276/Production/teg054.pdf>

Arizona

Arizona Department of Transportation
14370 West Van Buren Street
Goodyear, AZ 85338
(623) 932-2247
(623) 932-2441 Fax
Monday/Friday: 6 AM to 5 PM

State Location:

<http://www.azdot.gov/>

Pilot Car Info:

http://arizonatrucking.com/wp-content/uploads/2015/07/Pilot_Car_Operators_Rules.pdf

Arkansas

Arkansas Highway Patrol – Permits Section
10324 Interstate 30
Little Rock, Arkansas 72209
(501) 569-2381

State Location:

<http://www.arkansashighways.com/>

Pilot Car Info:

<http://www.arkansashighways.com/permits/regulations/escorts.htm>

British Columbia

(604) 660-2421

State Location:

<http://www.gov.bc.ca/tran/>

Pilot Car Info:

[http://www.bclaws.ca/EPLibraries/bclaws_new/document/ID/freeside/30_78#part division8](http://www.bclaws.ca/EPLibraries/bclaws_new/document/ID/freeside/30_78#part%20division8)

California

Northern:

California Department of Transportation
1823 14th Street
Sacramento, CA 95814
Mailing address:
California Department of Transportation
PO Box 942874, MS #41
Sacramento, CA 94274-0001
(916) 322-1297
(916) 322-4966 Fax

Southern:

California Department of Transportation
655 West 2nd Street, MS #618
San Bernardino, CA 92404-1400
Or mailing address:
California Department of Transportation
464 West 4th Street, MS #618
San Bernardino, CA 92404-1400
(909) 383-4637
(909) 388-7001 Fax

State Location:

<http://www.dot.ca.gov/hq/traffops/permits/faq.htm>

Pilot Car Info:

http://www.dot.ca.gov/trafficops/permits/docs/sc_pilotcar.pdf

Colorado

CDOT Permit Office
4201 East Arkansas Avenue, Room 290
Denver, Colorado 80222
Phone: 1-800-350-3765 (outside Metro-Denver)
(303) 757-9539 (local)
(303) 757-9719 (fax)

State Location:

<https://www.codot.gov/>

Pilot Car Info:

<http://www.coloradodot.info/business/permits/truckpermits/documents/rulesregsread.pdf>

Connecticut

Connecticut Department of Transportation
2800 Berlin Turnpike
Newington
CT 06131-7546
(860) 594-2880
(860) 594-2949 Fax

State Location:

<http://www.ct.gov/dot/cwp/view.asp?A=1394&Q=259546>

Pilot Car Info:

http://www.ct.gov/dot/lib/dot/Documents/dpermits/eh_dlr.pdf

Delaware

Delaware Department of Transportation
Headquarters
Administration Center
800 Bay Road
P.O. Box 778
Dover, DE 19903
302-760-2080
Motor Fuel Tax Administration
Hauling Permit Section
302-744-2700
302-739-6299 fax

State Location:

<http://www.deldot.gov/>

Pilot Car Info:

<http://www.deldot.gov/static/osow/policy.pdf>

Florida

Office Motor Carrier Compliance
Florida USDOT Number
1815 Thomasville Road
Tallahassee, Florida 32303-5750
Telephone: 850-617-3010

State Location:

<http://www.fdot.gov/>

Pilot Car Info:

<https://www.flrules.org/gateway/ChapterHome.asp?Chapter=14-26>

Georgia

Department of Transportation
Oversize Permit Unit
935 E Confederate Avenue, Building 24
Atlanta, GA 30316
Permit Office Hours: Monday through Friday 7:00 a.m. to 4:45 p.m.
Annual Permits - 8:00 AM - 4:00 PM 1-888-262-8306
Fax Telephone Numbers: (404)635-8501, (404)635-8509

State Location:

<http://www.dot.ga.gov/Pages/default.aspx>

Pilot Car Info:

<http://www.dot.ga.gov/PartnerSmart/permits/Documents/StudentWorkbook.pdf>

Amber Light Permit Website:

<http://dps.georgia.gov/00/article/0.2086.5635600.7400912.102736809.00.html>

http://dps.georgia.gov/vgn/images/portal/cit_11783501/102736809AMBER-LIGHTS_Application1011.pdf

Idaho

Idaho Transportation Department
3311 W. State Street · P.O. Box 7129
Boise, ID 83707-1129
Division of Motor Vehicles / Port of Entry & Over legal Permits
(208) 334-8420

DMV-Permits@itd.idaho.gov

State Location:

<http://itd.idaho.gov/dmv/poe/poe.htm>

Pilot Car Info:

<http://itd.idaho.gov/dmv/poe/documents/permits.pdf>

Illinois

Illinois Department of Transportation
2300 South Dirksen Parkway
Springfield, Illinois 62764
(800) 252-8636 within Illinois
(217) 785-1477 outside Illinois

For Forms or a Policy Book:
Permit Office: 217-785-8968

FAX number: 217-782-3573

PermitOffice@dot.il.gov

State Location:

<http://dot.state.il.us/>

Pilot Car Info:

<http://www.idot.illinois.gov/Assets/uploads/files/Doing-Business/Manuals-Guides-&-Handbooks/Highways/Permits/Oversize%20and%20Overweight%20Permit%20Movements%20on%20State%20Highways%202015.pdf>

Indiana

Indiana Department of Transportation
Motor Carrier Division
5252 Decatur Blvd, Suite R
Indianapolis, IN 46241
(317) 615-7320 during the hours of 7:30 a.m. to 4:30 p.m.
You can also fax your request at (317) 821-2336

Indiana Toll Road

P.O. Box 1

Granger, IN 46530

Phone (574) 674-8836

Fax (574) 674-9147

State Location:

<http://www.in.gov/indot/2528.htm>

Pilot Car Info:

<http://www.in.gov/dor/files/m204.pdf>

Iowa

Iowa Department of Transportation
Office of Motor Carrier Services
Park Fair Mall, 100 Euclid Ave.
PO Box 10382
Des Moines, IA 50306-0382
(515) 237-3264 Permit Division

State Location:

<https://iowadot.gov/mvd/motor-vehicle-division-home>

Pilot Car Info:

<https://www.legis.iowa.gov/docs/ACO/chapter/761.511.pdf>

Kansas

Kansas Trucking Connection
1500 Southwest Arrowhead
Topeka, Kansas 66614
(785) 271-3145 Option 2

State Location:

<http://www.ksdot.org/>

Pilot Car Info:

http://www.truckingks.org/ktc_handbook.pdf

Kentucky

Kentucky Department of Transportation
Division of Motor Carriers
200 Metro Street
Frankfort, KY 40622
(502) 564-7150
(502) 564-0992 Fax

State Location:

<http://transportation.ky.gov/Pages/default.aspx>

Pilot Car Info:

<http://www.lrc.state.ky.us/kar/601/001/018.htm>

Louisiana

Louisiana Department of Transportation and Development
Weights and Standards
1201 Capitol Access Road
Baton Rouge, LA 70802-4438
P.O. Box 94042
Baton Rouge, LA 70804-9042

The Permits Office is open weekdays from 6:00 am - 5:00 pm Central Time and can be reached at (225) 343-2345 or (800) 654-1433. (Please note that (225) 654-1433 is not a valid telephone number for the Permits Office).

The Weight Enforcement Office is open weekdays from 7:30 am - 4:15 pm Central Time and can be reached at (225) 377-7100.

The Louisiana Truck Center is open weekdays from 8:00 am - 4:30pm Central Time and can be reached at (225) 925-4322 or (888) 421-8757

State Location:

<http://www.dotd.louisiana.gov/highways/maintenance/permits/home.asp>

Pilot Car Info:

<http://www.oversizepilotcar.com/documents/LOUISIANA%20EQUIPMENT.pdf>

Maine

Maine Dept. of Secretary of State
Bureau of Motor Vehicles
Motor Carrier Services
29 State House Station
101 Hospital Street
Augusta, Maine 04333-0029
Tel: 207-624-9318
Fax: 207-622-5332

State Location:

<http://www.maine.gov/sos/bmv/>

Pilot Car Info:

<http://www.maine.gov/sos/bmv/commercial/olpermits.html>

Manitoba

(204) 945-3744

(204) 945-4261 Fax

State Location:

<http://www.gov.mb.ca/mit/mcd/mcpd/evp.html>

Pilot Car Info:

<http://permits.scranet.org/wp-content/uploads/2015/08/Manitoba.pdf>

Maryland

Hauling Permit Unit

7491 Connelley Drive

Hanover, Maryland 21076

Hours: M-F 7:30 am - 4:30 pm **Closed from 12:00pm - 1:00pm daily

Phone: 1-800-846-6435 or 1-800-543-4564

State Location:

<http://www.mdot.state.md.us/>

Pilot Car Info:

<http://www.sha.maryland.gov/oots/MD Hauling permit manual.pdf>

Massachusetts

Massachusetts Highway Trucking Permits Office

14 Beach Street

Milford, MA 01757

(781) 431-5148

State Location:

<http://www.massdot.state.ma.us/>

Pilot Car Info:

<http://www.mhd.state.ma.us/downloads/oversizedVehiclesFreight/cmv.pdf>

Michigan

Michigan Department of Transportation

Transport Permits Unit

7050 W. Saginaw, Suite 2

Lansing, MI 48917

517-373-2120

State Location:

http://www.michigan.gov/mdot/0,1607,7-151-9625_26039_29807---,00.html

Pilot Car Info:

http://www.michigan.gov/documents/MDOT_MoveOS_OW_T2_92127_7.pdf

Minnesota

By Mail:

Minnesota Department of Transportation

Oversize & Overweight Permit Section

395 John Ireland Boulevard

St. Paul, MN 55125

(651) 405-6000

(651) 215-9677 Fax

State Location:

<http://www.dot.state.mn.us/cvo/oversize/oversize.html>

Pilot Car Info:

http://www.dot.state.mn.us/cvo/oversize/Escort_Vehicles.pdf

Mississippi

Mississippi Dept. of Transportation

Office of Enforcement Permit Office

PO Box 1850 Jackson, MS 39215

(Toll Free) 1-888-737-0061

(Phone) 601-359-1717 (Fax) 601-359-1709

Mississippi Continued

State Location:

[Mdot.ms.gov/documents/enforcement/permits/permit%20Information/permit%20Rules.pdf](http://mdot.ms.gov/documents/enforcement/permits/permit%20Information/permit%20Rules.pdf)

Pilot Car Info:

<http://mdot.ms.gov/documents/enforcement/Permits/Permit%20Information/Permit%20Rules.pdf>

Missouri

Missouri Department of Transportation

Central Office

2211 St. Mary's Blvd.

PO Box 1787

Jefferson City, MO 65109 Phone: 1-888-275-6636 or 573-751-2551

State Location:

<http://www.modot.mo.gov>

Pilot Car Info:

<http://www.modot.org/mcs/documents/2009osowregbook.pdf>

Montana

Montana Department of Transportation

Motor Carrier Services Division

PO Box 4639

Helena, MT 59604-4639

(406) 444-6130

(406) 444-7670 Fax

State Location:

<http://www.mdt.mt.gov/>

Pilot Car Info:

http://mdt.mt.gov/publications/docs/manuals/truckers_handbook.pdf

Nebraska

State Dept. of Roads

Permit Office

Room 151

PO Box 94759

Lincoln, NE 68509

(Phone) 402-471-0034

(TWX or TELEX) 402-479-3906 (Fax) 402-479-3907

State Location:

<http://www.dor.state.ne.us/rpt/motr-carriers.htm>

Pilot Car Info:

<http://www.dor.state.ne.us/rpt/rules-prop/RR415-Chap3-2006.pdf>

Nevada

Counter Service is available at our Carson City headquarters office during the following hours:

Monday - Friday

8:00 a.m. - 4:30 p.m.

Over-dimensional Permits

Department of Transportation

1263 South Stewart Street

Carson City, NV 89712

Phone Service

Monday - Friday

7:30 a.m. - 5:00 p.m.

Permits will not be transmitted after 4:15 p.m.

1-800-552-2127

(775) 888-7410

FAX (702) 888-7103 CLOSED ON HOLIDAYS

County Permits are required in Clark County, Las Vegas, Nevada at (702) 455-6100

Nevada Continued

Amber Light and Hazardous Materials Permits

Highway Patrol
(775) 684-4622

Amber Light Permit Website:

<https://nvamberpermit.nv.gov/permit/>

State Location:

<http://www.nevadadot.com/business/trucker/overdimensional/>

Pilot Car Info:

<http://www.leg.state.nv.us/NAC/NAC-484D.html#NAC484DSec670>

New Hampshire

New Hampshire Department of Transportation
Room 190, JOM Building
7 Hazen Drive
Concord, New Hampshire 03302
Telephone: (603) 271-3734 Fax: (603) 271-3914

State Location:

<http://www.nh.gov/dot/business/index.htm>

Pilot Car Info:

<http://www.nh.gov/dot/org/operations/highwaymaintenance/overhaul/documents/tra304.pdf>

New Jersey

New Jersey Motor Vehicles Services
Motor Carriers Unit
CN 133
Trenton, NJ 08666
(Phone) 609-633-9402 (Fax) 609-633-9393

State Location:

<http://www.state.nj.us/mvc/>

Pilot Car Info:

<https://nj.gotpermits.com/njpass/home/current-rule.pdf>

New Mexico

NMDOT General Office
1120 Cerrillos Road
Santa Fe, NM, 87504-1149
Telephone: (505) 827-5100
Oversize Permits Office: (505) 827-0376 Fax: (505) 827-0384

State Location:

dot.state.nm.us

Pilot Car Info:

<http://www.nmcpr.state.nm.us/nmac/parts/title18/18.019.0008.htm>

New York

New York State Department of Transportation
Central Permit Office
50 Wolf Road, 1st Floor
Albany, New York 12232
888-783-1685
New York Trueway
Administrative Headquarters
200 Southern Blvd., P.O. Box 189
Albany, NY 12201-0189
(518) 436-2700 (Interchange 23)
New York Division
Suite 400

New York Continued

4 Executive Blvd.
Suffern, NY 10901
(845) 918-2500
Albany Division
200 Southern Blvd.
P.O. Box 189
Albany, NY 12201-0189
(518) 436-2700 (Interchange 23)
Syracuse Division
Suite 250, 2nd Floor
290 Elwood Davis Road
Liverpool, NY 13088-0308
(315) 437-2741 (Interchange 37)
Buffalo Division
455 Cayuga Road - Suite 800
Cheektowaga, NY 14225-0121
(716) 631-9017 (Interchange 51)
1-800-628-4431

State Location:

<https://www.dot.ny.gov/index>

Pilot Car Info:

<https://www.dot.ny.gov/nypermits/repository/escort.pdf>

North Carolina

North Carolina Dept. of Transportation
Oversize/Overweight Permit Unit
1568 MAIL SERVICE CENTER (MAIL)
RALEIGH NC 27699-1568
Suites, 109 & 110
1425 Rock Quarry Road (Delivery)
Raleigh NC 27610
osowpermits@dot.state.nc.us

Toll Free Calls

1-888-LRG-MOVE (single trip permit)(574-6683) 1-888-221-8166 (administrative personnel/annual permit/superload permit)

Local Calls

(919) 733-7154 (single trip permit)

(919) 733-4740 (administrative personnel/annual permit/superload permit)

Toll Free Fax: 1-888-222-8347 Local Fax: (919) 733-7828 or (919) 733-7921

State Location:

http://www.doh.dot.state.nc.us/operations/dp_chief_eng/maintenance/permits/contact/

Pilot Car Info:

<https://connect.ncdot.gov/business/trucking/Documents/Oversize%20Overweight%20Permit%20Handbook.pdf>

North Dakota

North Dakota Highway Patrol Headquarters
600 East Blvd Avenue
Dept. 504
Bismarck ND 58505
701-328-2455
701-328-1717 Fax
e-mail: ndhpinfo@state.nd.us

State Location:

<http://www.dot.nd.gov/>

Pilot Car Info:

<http://www.legis.nd.gov/information/acdata/pdf/38-06-02.pdf>

Northwest Territories

(867) 873-0431 Fax

State Location:

<http://www.dot.gov.nt.ca/live/pages/wpPages/home.aspx>

Pilot Car Info:

www.transport.nt.gov.au/data/assets/pdf_file/0011/19658/permit-guidelines-ooov.pdf

Ohio

Special Hauling Permits Section

614-351-2300

614-728-4099 (fax)

1610 West Broad St

Columbus, OH 43223

Ohio Turnpike Commission

682 Prospect Street

Berea, Ohio 44017

440-234-2081

State Location:

<http://www.dot.state.oh.us/permits/>

Pilot Car Info:

<http://www.dot.state.oh.us/Divisions/Operations/Maintenance/Permits/Pages/EscortRequirements.aspx>

Oklahoma

Oklahoma Department of Public Safety

Mailing Address:

PO Box 11415

Oklahoma City, OK 73136

Street Address:

3600 N. ML King Ave.

Oklahoma City, OK 73111

Telephone: 405-425-2424

State Location:

<http://www.dps.state.ok.us/>

Pilot Car Info:

http://www.oar.state.ok.us/viewhtml/595_30-3-17.htm

Ontario

Downsview

1201 Wilson Avenue

Downsview, ON M3M 1J8

Queen's Park/ Minister's Office

77 Wellesley Street West

Toronto, ON M7A 1Z8

(416) 327-9200

St. Catharines

301 St. Paul Street

St. Catharines, ON L2R 7R4

(800) 268-4686

State Location:

<http://www.mto.gov.on.ca/english/index.html>

Pilot Car Info:

<http://www.mto.gov.on.ca/english/trucks/pdfs/oversize-overweight-vehicle-guide.pdf>

Oregon

Motor Carrier Transportation Division
Over-Dimension Permit Unit
550 Capitol Street NE,
Salem, OR 97301
Phone 503-373-0000 - Monday-Friday, 7 a.m. - 5 p.m.
Walk-In Counter Service - Monday-Friday, 8 a.m. - 5 p.m.

State Location:

<http://www.oregon.gov/odot/Pages/index.aspx>

Pilot Car Info:

<http://www.odot.state.or.us/forms/motcarr/od/2359.pdf>

Pennsylvania

Pennsylvania Department of Transportation
Bureau of Maintenance and Operations
PO Box 8210
Harrisburg, PA 17105-8210
Hauling, Super Loads and APRAS – (717) 787-7269 or (717) 787-8645
Highway and Bridge Occupancy – (717) 787-5368 or (717) 705-1433

State Location:

<http://www.penndot.gov/Pages/default.aspx>

Pilot Car Info:

<http://www.penndot.gov/Doing-Business/Permits/HaulingInformation/Documents/CertifiedEscortProgramInformation.pdf>

Rhode Island

Rhode Island Division of Motor Vehicles
Main Street
Pawtucket, RI 02860
(401) 588-3020
Rhode Island Turnpike and Bridge Authority
P.O. Box 437
Jamestown, Rhode Island 02835-0437
Tel (401) 423-0800
Fax (401) 423-0830
Permits (401) 588-3011

State Location:

<http://www.ritba.org/> Turnpike and Bridge Authority site

<http://www.dmv.ri.gov/> Rhode Island DMV Permits

Pilot Car Info:

http://sos.ri.gov/documents/archives/regdocs/released/pdf/DMV/DMV_1673_.pdf

Saskatchewan

State Location:

<http://www.highways.gov.sk.ca/>

Pilot Car Info:

<http://www.qp.gov.sk.ca/documents/English/Regulations/Regulations/H3-01R8.pdf>

South Carolina

South Carolina Dept. of Transportation
OSOW Permit Office
1412 Shop Road
Columbia, SC 29201
South Carolina Department of Transportation
Attention: OSOW Permit Office
P.O. Box 191
Columbia, SC 29202 e-mail: OSOW_Help@dot.state.sc.us
(803) 253-6250 (Local) (803) 343-0700 (Fax)

South Carolina Continued

State Location:

<http://www.scdot.org/default.aspx>

Pilot Car Info:

http://www.dot.state.sc.us/doing/doingpdfs/permits/osow_guidelinesfor_movement.pdf

South Dakota

South Dakota Highway Patrol

Motor Carrier Services

118 West Capitol Avenue

Pierre, SD 57501-2000

(605) 773-4578

State Location:

<http://www.sddot.com/>

Pilot Car Info:

http://www.sdtruckinfo.com/docs/MCHandbook_chap5.pdf

Tennessee

Tennessee Department of Safety

Commercial Vehicle Division

1148 Foster Avenue - Cooper Hall

Nashville, TN 37210

Business Hours: 8:00 a.m. until 4:30 p.m. Monday through Friday

State Location:

<http://www.tdot.state.tn.us/>

Pilot Car Info:

<https://www.tn.gov/assets/entities/tdot/attachments/Tennesseehighwaymovements.pdf>

Texas

TxDOT's Motor Carrier Division

125 East 11th Street

Austin, Texas 78701-2483

(512) 486-5052

(512) 486-5007 Fax

State Location:

<http://www.dot.state.tx.us/default.htm>

Pilot Car Info:

<http://www.txdmv.gov/oversize-weight-permits/escort-and-equipment-requirements>

Utah

Utah Dept. of Transportation

Ports of Entry

Headquarters

4501 South 2700 West; Box 141200

Salt Lake City, UT 84114-1200

Telephone: 801-965-4000

Fax: 801-965-4936

State Location:

<http://www.udot.utah.gov/main/f?p=100:6:0:::V,T:1>

Pilot Car Info:

<https://www.udot.utah.gov/main/f?p=100:80:0:::1:T,V:4219>

Vermont

State of Vermont
Agency of Transportation
Department of Motor Vehicles
120 State Street,
Montpelier, VT 05603-0001
802-828-2064
802-828-5418 Fax

State Location:

<http://dmv.vermont.gov/>

Pilot Car Info:

http://dmv.vermont.gov/sites/dmv/files/pdf/DMV-VX012-Oversize_Permit_Rules.pdf

Virginia

Virginia Dept. of Motor Vehicles
Motor Carrier Services
PO Box 27412
Richmond, VA 23269
(866) 878-2582
(804) 367-1073 Fax

State Location:

<http://www.virginiadot.org/>

Pilot Car Info:

<http://www.dmv.virginia.gov/webdoc/pdf/hp405.pdf>

Washington D.C.

Washington, DC DOT
941B Capitol Street NE, Ste. 2300
Washington, DC 20001
(202) 442-4670

State Location:

<http://ddot.dc.gov/DC/DDOT>

Pilot Car Info:

Information not currently available at a website location

Washington

Washington Dept. of Motor Carrier Services Headquarters
921 Lakeridge Way SW
PO Box 47367
Olympia, WA 98504-7367
Phone: (360)704-6340
Fax: (360)704-6350
Monday thru Friday
Office hours: 7:00am-5:00pm
Permits hours 7:00am-4:30pm

State Location:

<http://www.wsdot.wa.gov/commercialvehicle/>

Pilot Car Info:

<http://apps.leg.wa.gov/WAC/default.aspx?cite=468-38-100>

West Virginia

West Virginia Dept. of Transportation
Permits Supervisor
Building Five, Room 337
1900 Kanawha Boulevard East
Charleston WV, 25305-0430
Phone: 304-558-0103

West Virginia Continued

State Location:

<http://www.transportation.wv.gov/Pages/default.aspx>

Pilot Car Info:

http://www.transportation.wv.gov/highways/maintenance/hauling_permits/Documents/PERMIT%20INFOMATION.pdf

Wisconsin

Wisconsin Department of Transportation

Motor Carrier Services

PO Box 7980

Madison WI 53707-7980

E-mail: oversize-permits.dmv@dot.state.wi.us

Call: (608)266-7320 FAX: (608)264-7751

State Location:

<http://www.dot.state.wi.us/business/carriers/osowgeneral.htm>

<http://www.dot.state.wi.us/business/carriers/osow-times.htm>

<http://www.dot.state.wi.us/business/carriers/osow-requirements.htm>

Pilot Car Info:

http://docs.legis.wisconsin.gov/code/admin_code/trans/252.pdf

Wyoming

Wyoming Department of Transportation

5300 Bishop Boulevard

Cheyenne, WY

82009-3340

(307) 777-4375 Office (307) 777-4289 fax

State Location:

www.dot.state.wy.us/home.html

Pilot Car Info:

www.dot.state.wy.us/home/trucking_commercial_vehicles.html

http://www.whp.dot.state.wy.us/home/size_and_weight/escort-information.html

Yukon

Transport Services

(867) 667-5729

(867) 667-3608 Fax

State Location:

<http://www.hpw.gov.yk.ca/trans/transportservices/carriercompliance/465.html>

Pilot Car Info:

http://www.gov.yk.ca/legislation/regs/oic2002_174.pdf

http://www.hpw.gov.yk.ca/pdf/Multiple_Trip_Permit_information.pdf

CVSA

Commercial Vehicle Safety Alliance

1101 17th St., N.W.

Suite 803

Washington, DC 20036

phone: 202-775-1623 fax: 202-775-1624

Location:

<http://www.cvsa.org>

Homeland Security

Transportation Security Administration

601 South 12th Street

Arlington, VA 20598

TSA-ContactCenter@dhs.gov or call: 1-866-289-9673

Transportation Workers Identification Card (TWIC) website

http://www.tsa.gov/what_we_do/layers/twic/index.shtm

FHWA

Federal Highway Administration
1200 New Jersey Ave. SE
Washington, D.C. 20590

Location:

<http://www.fhwa.dot.gov/>

Pilot Car Info:

http://ops.fhwa.dot.gov/freight/documents/law_enf_bp_guidelines/part_one.htm

FMCSA

Federal Motor Carrier Safety Administration
1200 New Jersey Ave. SE
Washington, D.C. 20590

Location:

www.fmcsa.dot.gov

Pilot Car Info:

http://ops.fhwa.dot.gov/freight/documents/law_enf_bp_guidelines/part_one.htm

NTSB

National Transportation Safety Board Headquarters
1200 New Jersey Ave. SE
Washington, D.C. 20590
(202) 314-6000

Location:

<http://www.nts.gov/>

USDOT

United States Department of Transportation
1200 New Jersey Ave. SE
Washington, D.C. 20590
dot.comments@ost.dot.gov

U.S. Department of Transportation
Federal Highway Administration
Office of Freight Management and Operations
1200 New Jersey Ave. SE

Washington, D.C. 20590

Phone: 202-366-9210

Fax: 202-366-3302

Toll free help-line: 866-367-7487

Web site: <http://www.ops.fhwa.dot.gov/freight>

Location:

<http://www.dot.gov/>

Pilot Car Info:

http://www.ops.fhwa.dot.gov/freight/documents/pilotcar_bpguideline/

PEVOA

Professional Escort Vehicle Operators Association
1654 Reunion Avenue
Suite 10B
South Jordan, Utah 84095

(801) 838-8999 Office (801) 838-8167 Fax

www.pevoa.com

Minimum Requirements across the U.S

Below is a comprehensive list to provide pilot/escort operations in all states within the U.S. Some requirements may exceed individual States requirements.

VEHICLE:

- Shall be a properly licensed and registered passenger vehicle or two-axle truck.
- Minimum weight of 2,000 GVW and not to exceed 8,000 GVW.
- Vehicle must be a minimum width of 60" wide, not including the mirrors on the vehicle.
- Minimum of a 100" wheelbase.
- Must have company signs displayed on each side of the vehicle.
- New York Vehicle Door Signs

COMPANY REQUIREMENTS/LICENSES:

- Nevada Amber Light Permit.
- Georgia Amber Light Permit.
- New Mexico Vehicle Inspection (*required prior to entering a port/scale with an over-dimensional load*)
- Louisiana Single Trip Permit.
- A National Safety Council Defensive driving course (8 Hours) **or** a Valid CDL.

DRIVER REQUIREMENTS/LICENSES:

- Minimum of 21 years old. (New York and Pennsylvania, 18 in all other states)
- Valid driver's license.
- Must hold a valid pilot/escort certification in the following states:

Arizona	Minnesota	Utah
Colorado	New York	Virginia
Florida	North Carolina	Washington
Georgia	Oklahoma	Wisconsin
Louisiana	Pennsylvania	

*NOTE: Most states have reciprocal agreements. Utah and Colorado certifications that are obtained through RSA Network Inc. are valid in all states listed above with the exception of New York. If you hold a New York Certification and Utah *or* Colorado Certification you'll be valid in all states.

- Must hold a valid flagger certification in the following states:

Alaska	Illinois	Oklahoma
Arizona	Missouri	Pennsylvania
Colorado	New Mexico	Utah
Florida	Ohio	


*NOTE: Utah and Colorado Flagger Certifications have reciprocal agreements with all states except Pennsylvania. Pennsylvania requires a flagging certification that is issued by the ATSSA.

<http://www.atssa.com/TrainingCertification/FlaggerInformation.aspx>

- Insurance in the amounts of \$1,000,000.00 for combined single limit and/or commercial auto coverage, and \$1,000,000.00 general or professional liability. The Acord form shall state that the policy covers pilot escort and flagging operations.
- Height pole and route survey work shall be listed if you plan to do this type of work operation.
- The Commonwealth of Pennsylvania shall be listed as an additional insured.

WARNING SIGNS:

- Shall display a sign that states "OVERSIZE LOAD". See chart on next page for mounting location.
- Size of sign shall be 60 inches wide 12 inches high with 10 inch high letters and a 1 ½" brush stroke.

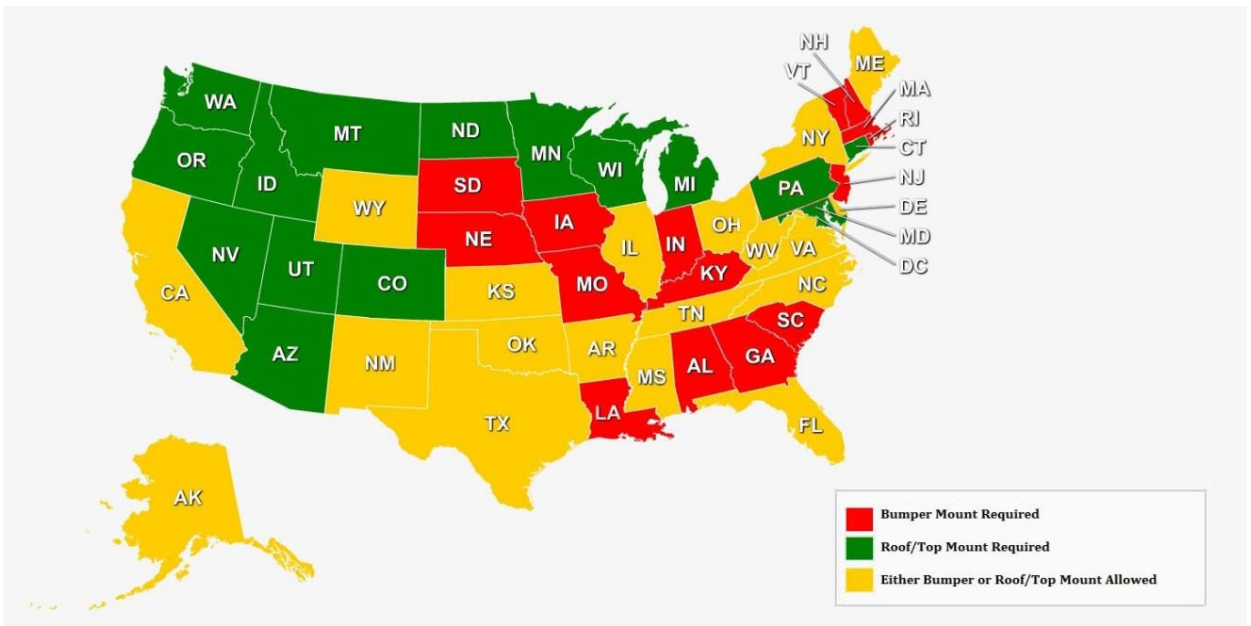

WARNING LIGHTS:

- A light-bar that is a minimum of 43 inches in length and a maximum of 52 inches in length.
- Amber colored lights
- Must be covered, or removed when not in use.

FLAGS:

- 2) 18" Square red/orange solid or mesh flags mounted on each side of the vehicle.
 ***NOTE: It's recommended to not run flags in Kansas; tickets are given if the flags exceed the widest extremities of the vehicle.

TWO-WAY COMMUNICATIONS:

- Citizens Band Radio, hard wired in the vehicle.
- Must be able to communicate with all other radios within the team moving the over-dimensional load.

HEIGHT POLE:

- Required to be in the vehicle in the state of Oklahoma, even if you will not be providing height pole services.

SAFETY EQUIPMENT:

- 3) 36" Orange Traffic Cones with 4 and 6 inch reflective collars.
- 2) 18" reflective stop/slow paddles
- 9) Reflective triangles *or* traffic cones with 6 inch reflective collars
- 8) Glow Sticks (Oklahoma)
- 2) 7'x18" Oversize Load Banners
- 1) Class 3 Orange Safety Vest
- 1) New York Certified Patch on Vest
- 1) Orange Hard Hat
- 1) 10 pound ABC fire extinguisher
- 1) 5 pound ABC fire extinguisher

- 2) Handheld 2-way communication radios
- 1) Flashlight that uses "D" cell batteries with a 1 1/2" lens width. – Must have spare batteries for flashlight.
- 1) 6" Red/orange traffic cone for flashlight *or* a traffic wand
- 1) First Aid Kit
- 2) 24" Square Red Flags on 36" staff
- 8) 18" Red/Orange Load flags – NO STAFF
- 1) Full size spare tire w/jack and lug wrench
- 1) Working cell phone



Revision Date: August 1981

Vehicle Requirements:

Pickup Truck, Passenger Auto, Carry-All, or Station Wagon.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" only
- Color: Yellow or orange background
- Size: 7' wide by 18" high
- Letters: Black
- Size of Letters: 10" high with 1 5/8" brush stroke
- Sign maybe modified to fit vehicle while maintain color scheme
- Acceptable Mounting Locations of Signs:
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Not acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing or revolving
- Acceptable Color: Amber
- Size of light(s): Not noted on regulations
- Number Required: Not noted on regulations
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: Not noted on regulations
- Use of Lights: During Load movement
- Degree of Visibility: Not noted on regulations
- Headlight/Taillights: Not noted on regulations

Flags Required on Escort Vehicle:

- Color of Flags: Red
- Size of Flags: 18"
- Mounting Locations: Mounted on each side

Two-Way Communication Radio:

- Type: Citizens Band or other acceptable radios
- Range: Not noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: In excess of 16' 0"

Safety Equipment Required:

None noted on regulations



Revision Date: March 2012

Vehicle Requirements:

Passenger vehicle or light truck not to exceed 19,000 lbs. GVWR. Commercial vehicle requirements apply if it goes over 10,000 GVWR. Un-laden during load movement can't tow vehicle or trailer

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

Must be 18 years of age. Must carry commercial vehicle insurance. Must have a valid flagger certification.

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" only
- Color: Yellow outlined in black
- Size: 48" wide (minimum) x 12" high
- Letters: Black
- Size of Letters: 10" high with 2" brush stroke
- Acceptable Mounting Locations of Signs:
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing, rotating, oscillating, or strobe
- Acceptable Color: Amber
- Size of light(s): Not noted on regulations
- Number Required: Not noted on regulations
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum sight Distance: 500 Feet
- Use of lights: During load movement
- Degree of Visibility: 360 degrees
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or fluorescent orange
- Size of Flags: 16" x 16"
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: CB Radios are the only approved communications
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

1. Orange vest or jacket (Must be highly reflective)
2. 18 or 24 inch Stop/Slow hand paddle
3. (2) 16" Square Red Flag (hand held)
4. (3) bi-directional emergency reflective triangles
5. (1) 5 pound BC fire extinguisher
6. First Aid Kit
7. Flashlight with a red cone and extra batteries



Revision Date: September 2009

Vehicle Requirements:

Passenger Car or 2-axle truck operating as a single unit. Currently registered and meets insurance requirements as provided by law.

Company Requirements and or Licenses:

Files an application with a program that meets the escort vehicle operator training and certification standards of the commercial vehicle safety alliance or an equivalent program that meets the same objectives, must complete the training and certification program within 120 days of the date of application.

Driver Requirements and or Licenses:

Must be 18 years of age and have a valid driver’s license. A minimum of 4 hours of traffic control/flagger training based on the National Safety Council’s Flagger training program must be completed. Can’t act as a flag person

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” Preferred
- Color: Yellow background
- Size: 5’ wide by 12” high
- Letters: Black
- Size of Letters: 6” high series “D”, 1” brush strokes
- Acceptable Mounting Locations of Signs:
 - Front Bumper: Not Acceptable
 - Rear Bumper: Not Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Must meet Arizona statues 28-947 D
- Acceptable Color: Amber
- Size of light(s): Not noted on regulations
- Number Required: Not noted on regulations
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum sight distance: Not noted on regulations
- Use of lights: During load movement
- Degree of Visibility: Not noted on regulations
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Red/Fluorescent Orange
- Size of Flags: 12” Square
- Mounting Locations : Each side of oversize load sign

Two-Way Communication Radio:

- Type: Two-way communications required
- Range: ½ mile minimum
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

1. (8) Emergency warning devices
2. (1) First-Aid Kit. Must meet FMCR 3.96 as amended
3. (2) Emergency staff-mounted warning flags manufactured to specifications prescribed under R17-6-302 (A).



Revision Date: November 2006

Vehicle Requirements:

Truck of not less than ¼ ton rating or an automobile of not less than 2,000 lbs GVW. Must be properly licensed in the state of origin. Must have the name and address or telephone number and city of the company/owner of the escort vehicle on each door plainly legible and visible to the motoring public.

Company Requirements and or Licenses:

The amounts of bodily injury coverage should be in amounts of not less than \$100,000 for each bodily injury or death. \$300,000 for each accident, and property damage coverage of not less than \$25,000 for each accident. (\$325,000 dollars minimum combined single limit coverage).

Driver Requirements and or Licenses:

Must have visible to motoring public: company name, address, phone number, and city of company on the door.

Warning signs:

Preferred Wording: "OVERSIZE LOAD" preferred
Color: Yellow background
Size: Not noted on regulations
Letters: Black
Size of Letters: 10" high with 2" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable
Rear Bumper: Acceptable
Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Cannot restrict visibility of warning lights.

Warning Lights:

Acceptable Types: Rotating or Strobe (80 flashes per minute)
Acceptable Color: Amber
Size of Lights: 6" high revolving or 3 ½" Strobe
Number Required: Not noted on regulations
Mounting Location: Roof or top mount
Minimum Candle Power: 35,000 CP rotating or 500,000 CP for strobe
Minimum Sight Distance: Not noted on regulations
Use of Lights: During load movement
Degree of Visibility: 360 Degree
Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red
Size of Flags: 18" Square
Mounting Locations: 40 to 70 Degrees in line with lights, mounted in line with warning lights

Two-Way Communication Radio:

Type: Two-way radio communication
Range: Not noted on regulations
Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 15' 1"

Safety Equipment Required:

1. (1) 10 lb. Minimum BC fire extinguisher
2. (4) 15 minute burning flares, light sticks or triangles
3. (2) Hand held red flags, 18" square



Revision Date: August 2015

Vehicle Requirements:

60" minimum width. Not to be used to transport materials or used to tow trailers or another vehicle during load movement.

Company Requirements and or Licenses:

Company name, city, and state shall be displayed on each front door and be plainly visible from a distance of 50 feet.

Driver Requirements and or Licenses:

Must be at least 18 years of age and properly licensed. May act as a flag person.

Warning signs:

Preferred Wordings: "OVERSIZE LOAD" preferred, "WIDE OR LONG LOAD" acceptable

Color: Yellow background

Size: 440 square inches

Letters: Black

Size of Letters: 6" high with 1" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Not Acceptable

Rear Bumper: Not Acceptable

Roof or Top Mount: Minimum of 48" above the ground, legible at 45 degrees from either side of the vehicle.

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Must be visible from 45 degrees front and rear.

Warning Lights:

Acceptable Types: Flashing

Acceptable Color: Amber

Size of Lights: Not noted on regulations

Number Required: Not noted on regulations

Mounting Location: Roof or top mount Must be removed or covered when not in use.

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: Not noted on regulations

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red

Size of Flags: 16" Square

Mounting Locations: Visible from front and rear of the vehicle. (Must be removed or covered when not in use)

Two-Way Communication Radio:

Type: Two-way communications required

Range: Not noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads 14' 0" and over

Safety Equipment Required:

1. (1) 18" Red hand held flag
2. (1) Stop/Slow hand held paddle
3. (1) Orange vest, shirt or jacket



Revision Date: August 2010

Vehicle Requirements:

Passenger vehicle or a two-axle pickup truck with maximum GVW of 16,000 lbs. and unobstructed view front and rear. At least 60” wide. Must be in safe operating conditions at all times. Properly licensed and registered. May not tow vehicle while escorting the load.

Company Requirements and or Licenses:

Meet and exceed minimum commercial vehicle insurance in the amounts of \$1,000,000 single limit combined at all times during terms of certification. See current regulations for more information relating to insurance requirements. Company signs must be visible on escort vehicle at all times during load movement.

Driver Requirements and or Licenses:

Must be 18 years old and have a valid Driver’s License. The operator of the pilot/escorts vehicle must obtain and maintain a certification to escort extra-large vehicles and loads on state highways. SC&RA certification program. Identification signs or placards must be displayed at all times on both sides on the vehicle and must be maintained. No passengers under the age of 16.

Warning Signs:

Preferred Wording: “OVERSIZE LOAD” preferred, “WIDE LOAD” or “LONG LOAD” acceptable

Color: Yellow background

Size: 60” wide by 10” high shall not exceed 84” wide by 18” high

Letters: Black

Size of Letters: 8” high with 1” brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Not Acceptable

Rear Bumper: Not Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be visible to traffic, front and rear. Removed or retracted when not in use.

Warning Lights:

Acceptable Types: Flashing (Capacity of 60 flashes per minute) – See 5-7 B for Rotating or oscillating lights

Acceptable Color: Amber or Yellow

Size of Lights: 6” in diameter

Number Required: (1) One but not more than (3) three

Mounting Location: Roof or top mount

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: 500 feet minimum

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Tailights: Turned on at all times of load movement

Flags Required on Escort Vehicle:

Color of Flags: Red or orange

Size of Flags: Not noted on regulations

Mounting Locations: Top of vehicle at 45 degree angle –Not to exceed more than 6” on either side

Two-Way Communication Radio:

Type: Two-way communications required

Range: ½ mile range minimum

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads 16’ 0” and greater

Safety Equipment Required:

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. (1) 18” or 24” Stop/Slow Paddle 2. Orange or White hard hat 3. (1) Orange Vest reflective type 2 4. (3) Reflective triangles 5. (1) 5 lb. or (1) 10 lb. BC Fire Extinguisher 6. (8) Burning flares or glow sticks 7. D-Cell flashlight with extra batteries and minimum 1 ½” lens and 6” red/orange cone 8. Height Pole (Loads 16’0 and higher. Must be made with non-conductive tip, made of non-destructible and flexible material.) | <ol style="list-style-type: none"> 9. (3) Orange traffic cones 18” high with 6” reflective collar 10. Copies of Pilot Escort and Oversize Restrictions Map, Height Restrictions Map, Bridge Wight Limit Map, Hazmat Map and Rule Book 11. First Aid Kit clearly marked 12. Spare tire and jack and lug wrench 13. (1) Oversize 14. (2) Two-way hand held simplex radios |
|--|---|



Vehicle Requirements:

60" minimum width and maximum 1 ½ ton capacity

Company Requirements and or Licenses:

Amber light permit required apply at MVD

Driver Requirements and or Licenses:

May act as flag person

Warning signs:

Preferred Wording: "OVERSIZE LOAD AHEAD/FOLLOWING" preferred

Color: Yellow background

Size: 7' wide by 18" high

Letters: Black

Size of Letters: 8" high with 1" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Not Acceptable

Rear Bumper: Not Acceptable

Roof or Top Mount: 4 feet from bottom of sign to roadway

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or rotating

Acceptable Color: Amber

Size of Lights: Not noted on regulations

Number Required: Not noted on regulations

Mounting Location: Roof or top mount

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: 1,000 feet front and rear

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red

Size of Flags: 18" square

Mounting Locations: Front and rear corners of vehicles

Two-Way Communication Radio:

Type: Two-way radio communications required

Range: Not noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Not noted on regulations

Safety Equipment Required:

1. (1) Hand held red flag 18"
2. (1) Red vest or jacket



Revision Date: February 2006

Vehicle Requirements:

Single unit non-permitted vehicle, no smaller than a compact car. Shall not be attached to any other vehicle.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" preferred
- Color: Yellow background
- Size: 60" long and 12" high
- Letters: Black
- Size of Letters: 8" high with 1" brush stroke

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Must be visible from 45 degrees front and rear.

Warning Lights:

- Acceptable Types: Flashing or rotating
- Acceptable Color: Amber or Red
- Size of Lights: Minimum of 43" Maximum 52"
- Number Required: Minimum 4 lights
- Mounting Location: Roof or top mount
- Minimum Candle Power: 35,000 CP
- Minimum Sight Distance: 1,000'
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or Orange fluorescent
- Size of Flags: 18" square
- Mounting Locations: Not noted on regulations

Two-Way Communication Radio:

- Type: Two-way communications required
- Range: Not noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Not noted on regulations

Safety Equipment Required:

Not noted on regulations



Vehicle Requirements:

Escort vehicle(s) must be a single unit vehicle with a gross vehicle weight rating of at least 2,000 pounds and less than 26,000 pounds. The vehicle must be properly licensed, registered, and operated by a qualified escort.

Company Requirements and or Licenses:

Sings or placards 8” x 12” visible on both right and left side of vehicle, clearly legible, including company/driver name and telephone number.

Driver Requirements and or Licenses:

18 year’s old, minimum. Have a valid driver’s license. Must complete FDOT Pilot Qualification course or course approved by FDOT. Must also successfully complete National Safety Council defensive driving 8 hour course *or* have a valid CDL.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” preferred
- Color: Yellow background
- Size: Note noted on regulations
- Letters: Black
- Size of Letters: 10” high with 11/2’ brush stroke

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Rotating, Strobe, or flashing
- Acceptable Color: Class 2 Amber
- Size of Lights: 5” diameter base rotating or 4” high flashing
- Number Required: (1) One minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: 33,000 CP
- Minimum Sight Distance: 500 ft.
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or Fluorescent orange
- Size of Flags: 18” x 18”
- Mounting Locations: Roof mount at 40 to 70 Degree Angle

Two-Way Communication Radio:

- Type: Two-way communications required
- Range: Not noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 14’ 6”

Safety Equipment Required:

1. (3) Reflective triangles or 18” high traffic cones
2. Stop/Slow or Stop/Go paddle min. 18” diameter with 6” high letters
3. (2) 5 lb. Fire Extinguishers
4. (2) Oversize Load signs 7’ wide by 18” high for load if loss of signs occur
5. (1) 12” by 12” Red or Fluorescent Orange hand held flag
6. Class 2 safety vest for daytime flagging, class 3 for night
7. Hard hat of any color
8. 3 36” high traffic cones with a 4” and 6” reflective band of material
9. Height pole for over height loads



Revision Date: January 2015

Vehicle Requirements:

Automobile or pickup truck must have Georgia Safety Inspection sticker or the equivalent from state of license and must be no less than ¼ ton but no more than 17,000 pounds GVWR or passenger vehicle no less than 2,000 pound gross weight.

Identification must be on each side of vehicle, showing name, city, state and company/owner of escort vehicle, must be a minimum of 8"x12" and legible from 50' during the day. Safety Equipment shall not reduce the visibility of the pilot/escort vehicle operator. Must have mirrors on both side of the vehicle outside. May not pull a trailer of any sort.

Company Requirements and or Licenses:

Amber light permit must be obtained prior to entering state; permit may be obtained from Dept. of Public Safety of Georgia. No passengers allowed except certified individuals in training.

Driver Requirements and or Licenses:

Escort vehicle operators will be required to obtain an approved certification prior to performing duties of an escort vehicle in Georgia.

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Orange or Yellow background
- Size: 6' wide by 12" high
- Letters: Black
- Size of Letters: 8" high by 4" wide
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Revolving or Flashing
- Acceptable Color: Amber
- Size of Lights: 8" minimum diameter
- Number Required: (1) One minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: 35,000 CP
- Minimum Sight Distance: Not less than ¼ mile
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red
- Size of Flags: 18" square
- Mounting Locations: Top of vehicle 45 degree angle, and not extending more than 6" beyond vehicle.

Two-Way Communication Radio:

- Type: Two-way radio
- Range: ½ Mile
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of 15'6" and made from non-conductive material

Safety Equipment Required:

Meet requirements of 49 CFR 391.11

- | | |
|--|---|
| 1. (1) Stop/Slow Paddle 18"x18" (reflective of nighttime) | 8. (1) Clearly marked First Aid Kit |
| 2. (1) Traffic wand or flashlight w/cone and additional batteries | 9. (1) 5 lb. type "BC" or "ABC" Fire Extinguisher |
| 3. (1) Hardhat | 10. (1) Spare Tire |
| 4. (1) Vest (Orange, yellow, yellow green or fluorescent versions) | |
| 5. (9) Triangles (17" arm length and minimum of 2") | |
| 6. (8) Red burning flares/glow sticks or equal alternate | |
| 7. (3) 18" High traffic cones | |



Revision Date: April 2015

Vehicle Requirements:

Passenger cars, light trucks, or vehicle authorized by the vehicle size and weight specialist. Vehicle shall not exceed 16,000 lbs. Light trucks used as escort vehicles shall not be heavily loaded. Vehicles towing trailers shall not qualify as escort vehicles.

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

Must have a valid driver's license

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 5' x 12'
- Letters: Black
- Size of Letters: 8" high with 1" brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Not Acceptable
 - Rear Bumper: Not Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

None noted on regulations

Warning Lights:

- Acceptable Types: Flashing or rotating, 60 to 90 flash per minute
- Acceptable Color: Amber
- Size of Lights: 4" flashing or 8 1/2" rotating
- Number Required: (1) Rotating or (2) Flashing
- Mounting Location: At each side of sign for flashing
- Minimum Candle Power: Must meet SAE-J-595-B
- Minimum Sight Distance: 500'
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Not noted on regulations

Flags Required on Escort Vehicle:

- Color of Flags: Red or fluorescent orange
- Size of Flags: 12" by 12"
- Mounting Locations: Four corners

Two-Way Communication Radio:

- Type: Two way radio facilities licensed under FCC regulations
- Range: 1/2 mile range minimum
- Use: Open and monitored at all times during load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Non-metallic height pole may be required at 16'0"

Safety Equipment Required:

1. Red warning flag on staff
2. Stop and Slow sign 18"
3. (3) bi-directional emergency reflective triangles
4. (1) five pound BC fire extinguisher
5. Orange reflective vest, shirt, or jacket
6. (2) Additional oversize load signs



Revision Date: 2015

Vehicle Requirements:

Passenger automobile or second division vehicle not to exceed 8,000 lb. GVW. Must afford clear and unobstructed vision both front and rear, must be in safe operating condition.

Company Requirements and or Licenses:

Must have in effect or be self-insured in the minimum amounts of \$500,000 per occurrence combined bodily injury and property damage.

Driver Requirements and or Licenses:

18 years of age and properly licensed, may act as flag person

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" preferred
- Color: Yellow background
- Size: 5' wide by 12" tall
- Letters: Black
- Size of Letters: 8" high with 1.41" brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing or rotating
- Acceptable Color: Amber
- Size of Lights: Not noted on regulations
- Number Required: (1) One minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: 500' during normal sunlight
- Use of Lights: During load movement
- Degree of Visibility: Not noted on regulations
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Red
- Size of Flags: 18" Square
- Mounting Locations: Widest extremities of vehicle

Two-Way Communication Radio:

- Type: Two-way communications required
- Range: Not noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads 14' 6" and over

Safety Equipment Required:

1. (1) One 18" Red hand held flag



Revision Date: 1988

Vehicle Requirements:

Minimum of (4) four wheels with maximum gross vehicle registration weight of 11,000 lbs.

Company Requirements and or Licenses:

Must have a valid driver's license

Driver Requirements and or Licenses:

Driver of escort/pilot car CANNOT act as a flag person

Warning signs:

Preferred Wording: "OVERSIZE LOAD" preferred
Color: Yellow background
Size: 6' wide by 18" tall
Letters: Black
Size of Letters: 12" high with 2" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable
Rear Bumper: Acceptable
Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Other state word/location acceptable if domiciled outside the state.

Warning Lights:

Acceptable Types: Flashing or rotating
Acceptable Color: Amber
Size of Lights: Not noted on regulations
Number Required: (1) One minimum
Mounting Location: Roof or top mount
Minimum Candle Power: Not noted on regulations
Minimum Sight Distance: 500' during normal sunlight
Use of Lights: During load movement
Degree of Visibility: 360 Degree
Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: (2) Red or orange
Size of Flags: Not noted on regulations
Mounting Locations: Widest extremities of vehicle

Two-Way Communication Radio:

Type: Two-way radio
Range: Not noted on regulations
Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 14'6"

Safety Equipment Required:

Not noted on regulations



Revision Date: May 2012

Vehicle Requirements:

Mid-size automobile or motor truck, sufficient mobility to be able to assist in an emergency, designed to afford clear and unobstructed vision both front and rear.

Company Requirements and or Licenses:

Proof of public liability insurance in the amounts of \$100,000/\$200,000/\$50,000

Driver Requirements and or Licenses:

Driver to be 18 years of age minimum and possess a valid class A, B, C or D driver's license.

Warning signs:

Preferred Wording: "OVERSIZE LOAD" recommended but not required

Color: Yellow

Size: 18" high by 7' long

Letters: Black

Size of Letters: 12" high with 1 1/2" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Not noted on regulations

Roof or Top Mount: Not noted on regulations

Other Restrictions and or Requirements:

Not noted on regulations

Warning Lights:

Acceptable Types: Revolving or strobe

Acceptable Color: Amber

Size of Lights: 7" high and 7" diameter

Number Required: (1) One minimum

Mounting Location: Roof or top mount Must be removed or covered when not in use.

Minimum Candle Power: 100 CP

Minimum Sight Distance: Not noted on regulations

Use of Lights: During permit movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red or orange fluorescent

Size of Flags: 18" square

Mounting Locations: Front bumper

Two-Way Communication Radio:

Type: Citizen band or other acceptable radios

Range: Not noted on regulations

Use: Not noted on regulations

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads exceeding 14' 4"

Safety Equipment Required:

Not noted on regulations



Revision Date: April 2007

Vehicle Requirements:

Passenger car or two-axle truck with minimum of 60” wide and maximum of one ton carrying capacity, can’t be towing a trailer. Left outside rear view mirror is required.

Company Requirements and or Licenses:

Minimum insurance required by state in which vehicle is insured. Signs on escort vehicle sides displaying company name.

Driver Requirements and or Licenses:

Minimum of 18 years of age with valid driver’s license and documents showing completion of a defensive driving course approved by National Safety Council. Escort driver shall have a copy of the manual “Traveling through Kansas” in vehicle and copy of Certification Program.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” required
- Color: Yellow
- Size: 5’ long 12” high
- Letters: Black
- Size of Letters: 8” high with 1 1/8” brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing or rotating
- Acceptable Color: Amber
- Size of Lights: 8” minimum diameter
- Number Required: (1) One minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: 1000’ minimum
- Use of Lights: During load movement
- Degree of Visibility: All directions
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: DO NOT USE FLAGS ON VEHICLE
- Size of Flags: DO NOT USE FLAGS ON VEHICLE
- Mounting Locations: DO NOT USE FLAGS ON VEHICLE

Two-Way Communication Radio:

- Type: Citizen Band or other acceptable radios
- Range: Not noted on regulations
- Use: Not noted on regulations

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Loads exceeding 14’ in height

Safety Equipment Required:

1. Standard 18” or 24” Stop/Slow paddle signs
2. (8) Reflective triangles
3. (8) Red burning flares
4. (3) Orange colored 18” high cones
5. (1) Orange hard hat
6. (2) Amber flashing lights 6” or higher (*Or one rotating or oscillating light*)
7. First Aid Kit
8. Spare tire, Jack & lug wrench
9. Orange vest or jacket
10. (2) 12” Red or Orange hand held flags
11. (1) 5 lb. BC Fire Extinguisher



Revision Date: July 2012

Vehicle Requirements:

Standard size automobile or pickup truck

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

Not noted on regulations

Warning signs:

Preferred Wording: "OVERSIZE LOAD" required
Color: Yellow background
Size: 7' wide by 18" high
Letters: Black
Size of Letters: 1.4" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable
Rear Bumper: Acceptable
Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Strobe, flashing or rotating
Acceptable Color: Amber
Size of Lights: Not noted on regulations
Number Required: (1) One minimum
Mounting Location: Roof or top mount
Minimum Candle Power: Not noted on regulations
Minimum Sight Distance: Not noted on regulations
Use of Lights: During load movement
Degree of Visibility: Not noted on regulations
Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red or orange fluorescent
Size of Flags: 18" square
Mounting Locations: Not noted on regulations

Two-Way Communication Radio:

Type: Two-way radio
Range: Not noted on regulations
Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Loads exceeding 15' in height

Safety Equipment Required:

Not noted on regulations



Vehicle Requirements:

Standard size automobile or pickup truck, no closed vans, buses, motor homes, or step side pickups. Louisiana based vehicles must have commercial plates with all out of state vehicles to have appropriate license. Out of state vehicles can obtain a 48-hour permit for interstate escorting Obtain information at: <https://perba.dotd.louisiana.gov/welcome.nsf/Escort?openform&type=Escort%20Vehicle> cannot tow trailers.

Company Requirements and or Licenses:

Must register with the Secretary of State prior to entering state. Proof of insurance in the amounts of \$50,000/\$100,000. Company name and address must be plainly visible to the motoring public. Company logo's acceptable.

Driver Requirements and or Licenses:

Valid operator license for all drivers outside of the state. Appropriate chauffeurs license for drivers domiciled in Louisiana. 45 MPH maximum speed during load movement, Must be able to read, may act as a flag person.

Warning signs:

Preferred Wording (2) Two "OVERSIZE LOAD" signs required for safety equipment only

Color: Yellow background
Size: 7' wide by 18" high
Letters: Black
Size of Letters: 10" high with 1 1/2" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: See note above
Rear Bumper: See note above
Roof or Top Mount: See note above

Other Restrictions and or Requirements:

No signs shall be mounted or shown on escort vehicle

Warning Lights:

Acceptable Types: Strobe (any size), Dome or Light Bar
Acceptable Color: (2) Amber, (2) Red
Size of Lights: 9" minimum diameter with 4" high lens
Number Required: (1) One minimum
Mounting Location: Roof or top mount with 60" minimum from pavement.
(2) Amber widest point of front edges.
(2) Red lights widest point on rear edges.
Minimum Candle Power: Must meet SAE-J-845 & 595 standards
Minimum Sight Distance: 500' minimum
Use of Lights: During load movement
Degree of Visibility: 360 Degree
Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red/Fluorescent or Orange
Size of Flags: 18" square
Mounting Locations: (2) Flags; mounted in line with warning lights (not to exceed 6 inches past widest part of vehicle)

Two-Way Communication Radio:

Type: Two-way communications required
Range: Not noted on regulations
Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 15' 10"

Safety Equipment Required:

1. 10 lb. BC Dry Fire Extinguisher
2. (4) 15 minute flares
3. (2) Hand held Red flags 12" square
4. (2) OVERSIZE LOAD signs for the load



Revision Date: 1990

Vehicle Requirements:

Light truck or automobile, outside mirrors mounted on both front doors, and must have inside rear view mirror.

Company Requirements and or Licenses:

Copy of Maine Overweight/Over dimensional Regulations book must be in vehicle at all times.

Driver Requirements and or Licenses:

18 years of age minimum, shall have maintained motor vehicle operator's license for the last two years consecutively immediately prior to operating a pilot/escort vehicle.

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 5' wide by 12" high
- Letters: Black
- Size of Letters: 8" high
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing, rotating, or light bar
- Acceptable Color: Amber
- Size of Lights: 6" minimum diameter or 4" minimum for rotating
- Number Required: (2) Two minimum
- Mounting Location: Roof (1) One extreme right and (1) One extreme left
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: Not noted on regulations
- Use of Lights: During load movement
- Degree of Visibility: Not noted on regulations
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Not noted on regulations
- Size of Flags: Not noted on regulations
- Mounting Locations: Not noted on regulations

Two-Way Communication Radio:

- Type: Two-way radio
- Range: ½ mile minimum
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: Not noted on regulations

Safety Equipment Required:

Not noted on regulations



Revision Date: April 2008

Vehicle Requirements:

Not noted on regulations

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

Not noted on regulations

Warning signs:

Preferred Wording: "OVERSIZE LOAD" or " WIDE LOAD" required

Color: Yellow background

Size: 5' long 12" high

Letters: Black

Size of Letters: 8" high

Acceptable Mounting Locations of Signs

Front Bumper: Not Noted

Rear Bumper: Not Noted

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Oscillating or rotating

Acceptable Color: Yellow

Size of Lights: 3" minimum diameter

Number Required: (1) minimum

Mounting Location: Roof or top mount

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: Not noted on regulations

Use of Lights: During load movement

Degree of Visibility: Front and Rear

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Not noted on regulations

Size of Flags: Not noted on regulations

Mounting Locations: Not noted on regulations

Two-Way Communication Radio:

Type: Two-way communications required

Range: Not noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Not noted on regulations

Safety Equipment Required:

Not noted on regulations



Vehicle Requirements:

Light truck or passenger car.

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

Not noted on regulations

Warning signs:

Preferred Wording: "OVERSIZE LOAD" preferred
Color: Yellow background
Size: 7' wide by 18" tall
Letters: Black
Size of Letters: 10" high with 1.41" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable
Rear Bumper: Acceptable
Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing
Acceptable Color: Amber
Size of Lights: Not noted on regulations
Number Required: (2) Two minimum
Mounting Location: Highest point on vehicle
Minimum Candle Power: Not noted on regulations
Minimum Sight Distance: Not noted on regulations
Use of Lights: During load movement
Degree of Visibility: Front and Rear of vehicle
Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red
Size of Flags: 24" square
Mounting Locations: Right and left rear

Two-Way Communication Radio:

Type: Citizens band or other acceptable radios
Range: Not noted on regulations
Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Not noted on regulations

Safety Equipment Required:

Not noted on regulations



Vehicle Requirements:

Passenger automobile or pickup truck.

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

Not noted on regulations

Warning signs:

Preferred Wording: "OVERSIZE LOAD" preferred
 Color: Yellow background
 Size: 60" wide by 12" tall
 Letters: Black
 Size of Letters: 8" high

Acceptable Mounting Locations of Signs

Front Bumper: Not Acceptable
 Rear Bumper: Not Acceptable
 Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or rotating
 Acceptable Color: Amber
 Size of Lights: Not noted on regulations
 Number Required: (1) One minimum
 Mounting Location: On top of cab
 Minimum Candle Power: Not noted on regulations
 Minimum Sight Distance: 500' minimum
 Use of Lights: During load movement
 Degree of Visibility: 360 Degree
 Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Not noted on regulations
 Size of Flags: Not noted on regulations
 Mounting Locations: Not noted on regulations

Two-Way Communication Radio:

Type: Two-way communications required
 Range: Not noted on regulations
 Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads exceeding 14' 6"

Safety Equipment Required:

Not noted on regulations



Revision Date: February 2013

Vehicle Requirements:

Passenger car, suv, van, or pickup truck that is in good operating condition. Minimum wheel base of 100 inches. May not carry loads of cargo that reduce the visibility of the driver. Trailers must not be towed during the movement of the over-dimensional load unless: (1) the party involved is a building mover licensed by the commissioner of transportation under Minnesota Statutes, section 221.81 and (2) the building being moved is not a temporary structure or manufacture housing. Vehicle that is in excess of 10,000 GVW or GVWR must comply with the Federal Motor Carrier Safety Administration (FMCSA).

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

Minimum of 18 years of age. Hold a valid operator’s license for the type of vehicle being operated. No passengers under 16 years of age during the movement of the over-dimensional load. Carry the issued certification card at all times while in pilot/escort operations. If operating as a front or rear pilot car driver shall not perform as a tillerman/steerman for the load being escorted. A tillerman/steerman shall not be in the pilot/escort vehicle when a steering activity is being performed.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD”
- Color: Yellow background
- Size: 60” wide 10” high
- Letters: Black
- Size of Letters: 8” high with 1” brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Not Acceptable
 - Rear Bumper: Not Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing or rotating simultaneously
- Acceptable Color: Yellow or amber
- Size of Lights: 4” diameter or a minimum lens surface area of 12.5” square
- Number Required: Minimum (1)
- Mounting Location: Top of the vehicle and visible 360 degrees.
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: 500’ minimum during normal sunlight
- Use of Lights: Turned on at all times of movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

- Color of Flags: Red, orange, or yellow day-glow
- Size of Flags: 18” square
- Mounting Locations: In line with the “oversize load” sign at approximately 45 degree angles

Two-Way Communication Radio:

- Type: Two-way simplex (must be compatible with accompanying vehicles)
- Range: ½ mile
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 15’ 6”

Safety Equipment Required:

1. (1) 18 or 24 inch STOP/SLOW paddle (reflective for nighttime)
2. Class 2 safety vest
3. (1) Flashlight (1.5” lens width, extra batteries or a charger)
4. (1) six inch long orange/red cone or traffic wand (red/orange)
5. (9) reflective triangles or reflectorized 18” orange traffic cones
6. (8) fuses, flares, red glow sticks, or approved alternative
7. (3) 18” traffic cones
8. (1) Vinyl or mesh 7’x18” “OVERSIZE LOAD” sign
9. First aid kit clearly marked and labeled.
10. Height pole when required.
11. (1) five-pound capacity serviceable ABC fire extinguisher
12. (1) Handheld simplex 2-way device



Vehicle Requirements:

None noted on regulations

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

May act as a flag person

Warning Signs:

Preferred Wording: "OVERSIZE LOAD"

Color: Yellow or Orange background

Size: 7' x 18"

Letters: Black

Size of Letters: 10" high series with 1 5/8" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or revolving

Acceptable Color: Amber

Size of Lights: None noted on regulations

Number Required: (2) Two minimum

Mounting Location: Roof or top mount

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: 500 feet

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Red, (2) Two required

Size of Flags: 18" square

Mounting Locations: Top or roof, same height as warning light or on a 3' staff attached to front bumper.

Two-Way Communication Radio:

Type: Two-way communication required

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Not noted on regulations

Safety Equipment Required:

Not noted on regulations





Vehicle Requirements:

Passenger automobile, pickup truck, utility vehicle, station wagon, or equivalent vehicle, with unobstructed vision to the front and rear and in safe operating condition.

Company Requirements and or Licenses:

Minimum financial responsibility such as automobile personal injury liability insurance in the amounts of \$25,000/\$100,000/\$25,000

Driver Requirements and or Licenses:

Properly licensed, obey all traffic laws must be at least eighteen years of age.

Warning Signs:

Preferred Wording: "OVERSIZE LOAD" required

Color: Yellow background

Size: 5" wide by 12" high

Letters: Black

Size of Letters: 8" high

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Optional, must be visible from 300'

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Not required but may be used

Acceptable Color: See above

Size of Lights: See above

Number Required: See above

Mounting Location: See above

Minimum Candle Power: See above

Minimum Sight Distance: See above

Use of Lights: See above

Degree of Visibility: See above

Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red/Fluorescent Orange

Size of Flags: 18" square on a staff

Mounting Locations: (2) Two on front bumper corners and (2) Two on rear bumper corners

Two-Way Communication Radio:

Type: Two-way radio

Range: Not noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

1. (1) 18" red hand held flag
2. (1) orange vest or jacket
3. (1) stop/slow paddle



Vehicle Requirements:

Passenger automobile or two-axle truck a minimum of 60 inches wide shall not exceed 2 tons

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning Signs:

Preferred Wording: "OVERSIZE LOAD" for all loads over 12' 0" wide

Color: Light in color background

Size: Must be visible from 500'

Letters: Black

Size of Letters: 8" high

Acceptable Mounting Locations of Signs

Front Bumper: Not Acceptable

Rear Bumper: Not Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: (1) Strobe (2) Flashing

Acceptable Color: Amber

Size of Lights: 5" minimum diameter

Number Required: (2) Two minimum

Mounting Location: Roof or top mount

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: Not noted on regulations

Use of Lights: During load movement

Degree of Visibility: Front and rear

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: None noted on regulations

Size of Flags: None noted on regulations

Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: Two-way communication required

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Revision Date: January 2001

Vehicle Requirements:

Single vehicle such as a standard size automobile or truck, must be at least 60" wide

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning Signs:

Preferred Wording: "CAUTION WIDE LOAD" preferred

Color: Yellow background

Size: 5" wide by 12" tall

Letters: Black

Size of Letters: 8" high

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or rotating

Acceptable Color: Amber or yellow

Size of Lights: 6" minimum diameter

Number Required: (2) Two minimum

Mounting Location: Roof or top mount

Minimum Candle Power: 50 CP

Minimum Sight Distance: 800'

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on at all times of movement

Flags Required on Escort Vehicle:

Color of Flags: Red

Size of Flags: 18" square on staff

Mounting Locations: Front and rear bumper corners

Two-Way Communication Radio:

Type: Citizens band or other acceptable radios

Range: Not noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: Not noted on regulations

Safety Equipment Required:

Not noted on regulations



Vehicle Requirements:

Passenger car or a two-axle truck not exceeding a (GVW) rating 16,000 pounds

Company Requirements and or Licenses:

Valid driver's license, taken a flagging class

Driver Requirements and or Licenses:

Driver may act as a flag person, must be 18 years of age minimum, identification placard each side visible 50'

Warning Signs:

Preferred Wording: "OVERSIZE LOAD" for all loads over 12' 0" wide

Color: Yellow or contrasting background

Size: 60" wide by 12" tall

Letters: Black

Size of Letters: 10" high with 1 5/8" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Not Acceptable

Rear Bumper: Not Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or rotating. AMBER LIGHT PERMIT REQUIRED, CONTACT NHP.

Acceptable Color: Amber

Size of Lights: 5" minimum diameter

Number Required: (2) Two minimum

Mounting Location: Roof or top mount

Minimum Candle Power: 50 CP

Minimum Sight Distance: 500'

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: None noted on regulations

Size of Flags: None noted on regulations

Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: Two-way communication required

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 15' 6"

Safety Equipment Required:

1. 18" Stop/Slow paddle with 5' pole
2. (1) One 18" Red flag on staff
3. (1) One Orange/Yellow-Green vest, jacket, or shirt (high-visibility, safety apparel set forth in ANSI/ISEA 107-2004)
4. (3) Three Bi-directional emergency reflective triangles or 3 orange road cones
5. 5 pound BC fire extinguisher
6. Hard hat



Revision Date: April 2015

Vehicle Requirements:

No smaller than a compact automobile or pickup truck

Company Requirements and or Licenses:

Not noted on regulations

Driver Requirements and or Licenses:

18 years old with license for 2 years, must know the rules

Warning Signs:

Preferred Wording: "OVERSIZE LOAD" preferred

Color: Yellow background

Size: Not less than 5 feet wide and 12 inches high

Letters: Black

Size of Letters: 10" high with 1.4" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or rotating

Acceptable Color: Amber

Size of Lights: 4" diameter

Number Required: (1) One light bar with four flashing lights

Mounting Location: Roof or top mount

Minimum Candle Power: None noted on regulations

Minimum Sight Distance: 1000 feet in all directions

Use of Lights: During load movement

Degree of Visibility: None noted on regulations

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: None noted on regulations

Size of Flags: None noted on regulations

Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: Two-way communication required

Range: Distance of 1/2 mile

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Vehicle Requirements:

Standard size automobile or pickup truck

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning Signs:

Preferred Wording: "OVERSIZE LOAD" or "WIDE LOAD" required

Color: Yellow background

Size: 72" wide by 12" tall

Letters: Black

Size of Letters: 10" high

Acceptable Mounting Locations of Signs

Front Bumper: Front for front escort vehicle ONLY, NOT BOTH.

Rear Bumper: Rear for the rear escort vehicle ONLY, NOT BOTH.

Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Signs and flags can only be mounted in one location, front mounting for front escort and rear mounting for rear escort.

Warning Lights:

Acceptable Types: None noted on regulations for use at any time

Acceptable Color: Not allowed

Size of Lights: Not allowed

Number Required: Not allowed

Mounting Location: Not allowed

Minimum Candle Power: Not allowed

Minimum Sight Distance: Not allowed

Use of Lights: Not allowed

Degree of Visibility: Not allowed

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Red

Size of Flags: 18" square

Mounting Locations: Front bumper for front escort and rear bumper for rear escort

Two-Way Communication Radio:

Type: Citizens band or other acceptable radios

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Revision Date: September 2000

Vehicle Requirements:

Standard size automobile or pickup truck with 100” minimum wheelbase, (1 ½) one and ½ ton load capacity maximum. Motorcycles not permitted. Two outside rearview mirrors, one on each front door.

Company Requirements and or Licenses:

Each Port of Entry can inspect the pilot/escort vehicle and receive a cab card as long as the necessary safety equipment is present (required PRIOR to load movement.)

Driver Requirements and or Licenses:

Minimum insurance in the amounts of \$50,000/\$100,000/\$25,000.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” required
- Color: Yellow background
- Size: 5’ wide by 12” tall
- Letters: Black
- Size of Letters: 10” high 1” wide
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing, rotating, or fixed
- Acceptable Color: Amber
- Size of Lights: None noted on regulations
- Number Required: (2) Two minimum
- Mounting Location: Roof (Lights at end of sign)
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 1000’ minimum in normal sunlight
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: (2) Red, florescent red or florescent orange
- Size of Flags: 12” by 12”
- Mounting Locations: Removed when not in use.

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: None noted on regulations

Safety Equipment Required:

1. (1) 2 ½ lb. CO2 Extinguisher
2. (3) 15 minute flares
3. (3) Reflective triangles
4. (1) Orange/Red vest
5. (1) Orange/Red hard hat
6. (1) 14” Stop/Caution paddle 8” handle



Revision Date: July 2004

Vehicle Requirements:

Minimum wheelbase of 100” and display proper insignia as mandated by the NY State DOT, the proper insignia must be mounted on each front door of all escort vehicles.

Company Requirements and or Licenses:

Must review permit with operator of over dimensional load, responsible for ensuring proper signing, lighting and other special requirements designated on permit. Must have license and proof of certification at all times during load movement, the route must be reviewed. If permitted load is not in compliance the escort vehicle WILL NOT escort.

Driver Requirements and or Licenses:

Must be 21 years of age. Have a valid license in the state or jurisdiction in which you are a resident. (Those out of state drivers who do not have current New York State driving privileges are not eligible for escort certification.) Comply with all terms, conditions, requirement and regulations set forth by the permitting agency in the State of New York. Pass the New York State Escort Drivers Certification test.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” required on both sides of sign
- Color: Highway Yellow background
- Size: 5’ long by 12” high
- Letters: Black
- Size of Letters: 8” high
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Signs must be mounted on both front and rear of vehicle.

Warning Lights:

- Acceptable Types: LIGHT BAR consisting of flashing or strobe lights
- Acceptable Color: Amber
- Size of Lights: LIGHT BAR Length 43” min/52” max, Height 4” min/8” max Width 10” min/13” max.
- Number Required: (2) Two lights min. at each end of bar, *(2) 95 and (2) 150 FPM if flashing lights
- Mounting Location: Roof mount
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 1,000 feet
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or Fluorescent orange
- Size of Flags: 18 inches square
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: All loads 13’ 6” and greater

Safety Equipment Required:

1. (1) Stop paddle 18 inches or larger
2. (1) Orange Vest with proper identification patch
3. (3) Reflective triangles
4. (3) Warning flares
5. (2) 18” Sq. Red/Fluorescent Orange flags on staff
6. (1) 5lb. or larger BC fire extinguisher
7. (1) Measuring device for over height loads
8. Cellular Telephone



Revision Date: May 2009

Vehicle Requirements:

A truck (single vehicle) not less than ¼ ton rated load capacity but a manufacturer’s GVW rating less than 17,000 lbs. or a single passenger vehicle of not less than 2,000 lbs. GVW. Escort vehicle is not authorized to tow a trailer. Must be properly registered and currently licensed in home state.

Company Requirements and or Licenses:

Signs bearing company name, address, and telephone number shall be displayed on each side of the vehicle and measure at least 8” by 12”. Escort vehicle must carry certification card while escorting a permitted load.

Driver Requirements and or Licenses:

Driver must be certified to operate an escort vehicle crossing or passing through North Carolina. Escort vehicle shall monitor trailing traffic build-up and pull to the roadside periodically as the opportunity arises to allow lines of traffic to clear. No passengers allowed, must be 21 years of age or at least 18 years of age with class A driver’s license.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” or “WIDE LOAD” required
- Color: Yellow background
- Size: To extend the entire width of vehicle
- Letters: Black
- Size of Letters: 10” high with 1 ½” brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Rotating sealed beam or strobe
- Acceptable Color: Amber
- Size of Lights: 5” minimum diameter and 4” minimum height, 60 flashes per minute SAE-J-845
- Number Required: (1) One minimum
- Mounting Location: Roof or top mount with 72” minimum height from roadway
- Minimum Candle Power: 35 CP 800 watts
- Minimum Sight Distance: 500’ minimum in normal sunlight
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or orange
- Size of Flags: 18” square
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: Two way radio contact with power unit of mobile/modular combination
- Range: ½ mile minimum
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: All loads 14’ 5” or greater, or at Officer’s discretion

Safety Equipment Required:

1. Stop/Slow paddle 18” by 18” w/6” letters on rigid handle
2. Fire Extinguisher 5 lb. Type BC or ABC
3. Safety vest, shirt, or coat while flagging, Orange, Yellow, Yellow-green, or fluorescent version of these colors
4. (3) Bi-directional reflective triangles with minimum 17” arm length and minimum arm width of 2”



Vehicle Requirements:

Passenger vehicle or 2-axle truck only, vehicle must be in safe operating condition at all times.

Company Requirements and or Licenses:

Vehicle must be inspected and an approved equipment cab card will be issued, good for (1) one year, showing that the vehicle meets the state's requirements.

Driver Requirements and or Licenses:

18 years of age minimum, must have a valid driver's license.

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 60" long by 12" high
- Letters: Black
- Size of Letters: 8" high with 1" brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Not Acceptable
 - Rear Bumper: Not Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Rotating or Flashing
- Acceptable Color: Amber
- Size of Lights: None noted on regulations
- Number Required: None noted on regulations
- Mounting Location: Both ends on sign
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: None noted on regulations
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: None noted on regulations
- Size of Flags: None noted on regulations
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Revision Date: January 1995

Vehicle Requirements:

Passenger sedan, open van type vehicle, station wagon, or two axle open panel or pickup truck. Not to exceed one ton. Sports cars, convertibles, or novelty vehicles are not permitted. Rear view mirrors on outside front doors required, vehicle must be in good mechanical condition, carry one spare tire.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

Must be 18 years old and have a valid driver's license issued by the state the vehicle is registered. Driver must act as a flagman.

Warning signs:

Preferred Wording: "OVERSIZE LOAD" required and plainly visible to traffic

Color: Yellow background

Size: 5' long by 12" high

Letters: Black

Size of Letters: 8" high

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Flashing or rotating beacon

Acceptable Color: Amber

Size of Lights: None noted on regulations

Number Required: (1) One minimum

Mounting Location: Roof or top mount

Minimum Candle Power: None noted on regulations

Minimum Sight Distance: 1,000' during normal sunlight

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: None noted on regulations

Size of Flags: None noted on regulations

Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: Two-way communication required

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads over 14' 6"

Safety Equipment Required:

1. (1) 16" Red hand held flag

2. (1) Red/Orange safety vest



Revision Date: July 2009

Vehicle Requirements:

Not less than ¼ ton rated pickup truck or automobile and not less than 2,000 lbs. must have outside rearview mirrors mounted on each front door of the pilot/escort vehicle.

Company Requirements and or Licenses:

Company Name/Address on front doors, out of state pilot/escorts can provide interstate moves without special permit. Intrastate moves will require a permit that can be purchased from the Oklahoma Tax Commission MVRD. Oversize Permit call (877) 425-2390.

Driver Requirements and or Licenses:

Driver may act as a flag person to direct traffic

Warning signs:

Preferred Wording:	“OVERSIZE LOAD” required
Color:	Yellow background
Size:	5’ long by 12” high
Letters:	Black
Size of Letters:	10” high with 1 ½” brush stroke
Acceptable Mounting Locations of Signs	
Front Bumper:	Acceptable
Rear Bumper:	Acceptable
Roof or Top Mount:	Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types:	Flashing or *rotating or beacon
Acceptable Color:	Amber
Size of Lights:	*10” minimum diameter by 8” high
Number Required:	(1) One minimum
Mounting Location:	Roof or top mount
Minimum Candle Power:	None noted on regulations
Minimum Sight Distance:	500’ during normal sunlight
Use of Lights:	During load movement
Degree of Visibility:	360 Degree
Headlight/Taillights:	Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags:	Red
Size of Flags:	12” Square on a staff
Mounting Locations:	Top of cab

Two-Way Communication Radio:

Type:	Two-way communication required
Range:	½ mile
Use:	All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 15’9”

Safety Equipment Required:

1. (1) Red hand held flag
2. (4) 15 minute flares or (3) portable triangle reflector units
3. (1) 10lb. BC Fire Extinguisher or (2) 5lb. ABC Fire Extinguisher
4. 18” Stop/Slow paddle
5. Orange hard hat
6. Orange jacket or vest
7. Flashlight powered by at least (2) D cell batteries
8. Full size spare tire
9. Tire Jack
10. Lug Wrench



Revision Date: July 2004

Vehicle Requirements:

Passenger car, pickup truck, or truck of legal size and weight. Combinations of vehicles are not allowed. Pilot vehicles are under the direct supervision of the over-dimensional load operator.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

Have a valid operator's license from the state of domicile; driver may act as a flag person. Possibility of future pilot/escort certification, but at the time of publication no certification is required.

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 5' long by 10" high
- Letters: Black
- Size of Letters: 8" high with 1" brush stroke, series "B"
- Acceptable Mounting Locations of Signs
 - Front Bumper: Not Acceptable
 - Rear Bumper: Not Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Must be mounted to afford full view at all times.

Warning Lights:

- Acceptable Types: Flashing or *revolving. Strobe 360 degree visibility
- Acceptable Color: Amber
- Size of Lights: 4" minimum diameter, 30 FPM min. *125 Sq. inches, 30 FPM min.
- Number Required: (2) Two flashing (1) One revolving
- Mounting Location: Roof and at ends of sign brackets
- Minimum Candle Power: 30 CP
- Minimum Sight Distance: 500' during normal sunlight
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: None noted on regulations
- Size of Flags: None noted on regulations
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: Loads exceeding 14' 0"

Safety Equipment Required:

1. (2) 18" Red flags with 36" staff
2. (8) Safety flares or reflectors



Vehicle Requirements:

The vehicle must be an FHWA Class 2 or 3. Must display an identification emblem approved by the Department. See template at: <http://www.penndot.gov/DoingBusiness/Permits/HaulingInformation/Pages/default.aspx>. No towing allowed. Must have "State Certified Escort Vehicle" Emblem affixed to the vehicle 12"x 12" Reflective Hi-Vis Yellow, with Black or Dark Blue Vinyl.

Company Requirements and or Licenses:

Must be minimum of 21 years old. Must have at least 3 years' experience escorting oversized/overweight loads. Must have a valid license in the state or jurisdiction in which you reside. Must complete a minimum 8-hours of classroom training from the Commonwealth of Pennsylvania or an accredited program. Must possess documentation of completion of a defensive driving course. Must possess documentation of completion of Flagger Training Course as outlined in PennDOT Publication 408 Section 901.3. Must have a valid flagger certification issued by the ATSSA: <http://www.atssa.com/TrainingCertification/FlaggerInformation.aspx>

Driver Requirements and or Licenses:

Driver may act as a flag person

Warning signs:

Preferred Wording:	"OVERSIZE LOAD" required
Color:	Yellow background
Size:	5' wide by 12" high
Letters:	Black
Size of Letters:	8" high
Acceptable Mounting Locations of Signs	
Front Bumper:	Not Acceptable
Rear Bumper:	Not Acceptable
Roof or Top Mount:	Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types:	Flashing or revolving. Must meet Penn. Statutes: 4572, 6107, 15.3, 173.3
Acceptable Color:	Amber
Size of Lights:	None noted on regulations
Number Required:	(1) One minimum with (2) Two maximum
Mounting Location:	Roof or top mount
Minimum Candle Power:	None noted on regulations
Minimum Sight Distance:	None noted on regulations
Use of Lights:	During load movement
Degree of Visibility:	None noted on regulations
Headlight/Taillights:	Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags:	None noted on regulations
Size of Flags:	None noted on regulations
Mounting Locations:	None noted on regulations

Two-Way Communication Radio:

Type:	Two-way communication required
Range:	None noted on regulations
Use:	All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of:	All loads at 14' 6" or greater
-----------------------------	--------------------------------

Safety Equipment Required:

1. Cellular Telephone
2. Stop/Slow Paddle
3. Hardhat that meets ANSI Type II requirements.
4. Vest or high visibility clothing that meets ANSI Class 2 or 3 safety garment.
5. 2 channelizing devices or cones.
6. Red-burning flares, glow sticks or equivalent illumination device
7. Fire extinguisher
8. Traffic wand flashlight
9. Spare tire, jack and lug wrench
10. Escort shall not possess equipment that would simulate law enforcement personnel.
(included but not limited to Red or Blue lights, badges on uniforms)



Vehicle Requirements:

At least the size of a compact car or larger

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 5' long by 12" high
- Letters: Black
- Size of Letters: 10" high with 1.4" brush stroke

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing
- Acceptable Color: Amber
- Size of Lights: None noted on regulations
- Number Required: (2) Two minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: None noted on regulations
- Use of Lights: During load movement
- Degree of Visibility: Front and rear
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: None noted on regulations
- Size of Flags: None noted on regulations
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:


- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations

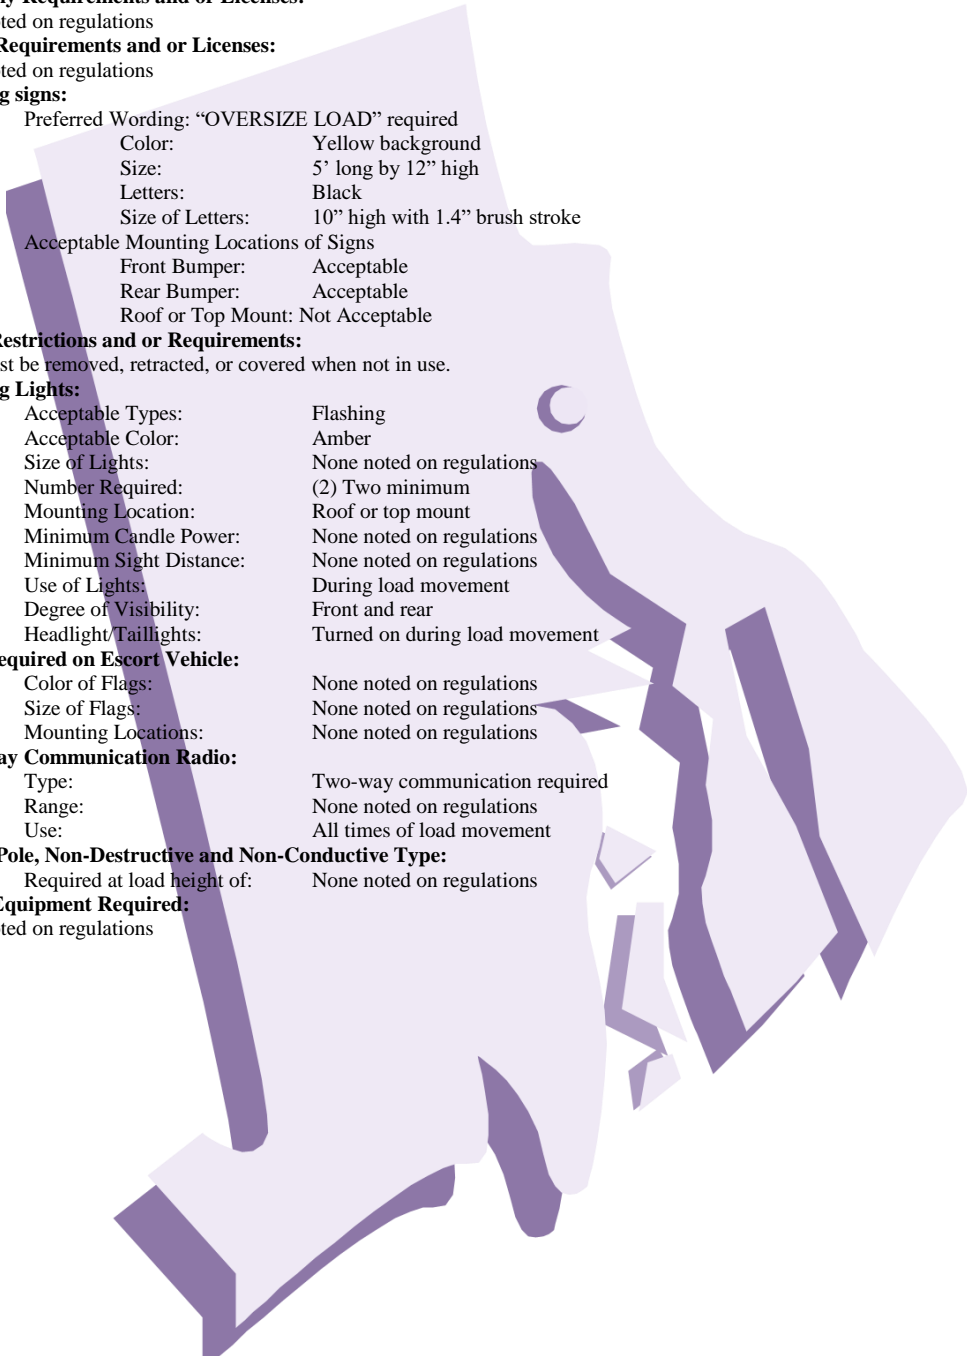



Vehicle Requirements:

None noted on regulations

Company Requirements and or Licenses:

Serial # of truck

Driver Requirements and or Licenses:

Driver may act as a flag person

Warning signs:

Preferred Wording: "OVERSIZE LOAD" or "WIDE LOAD"

Color: Yellow background

Size: None noted on regulations

Letters: Black

Size of Letters: 12" high with 1/2" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Rotating beacon or strobe light

Acceptable Color: Amber

Size of Lights: None noted on regulations

Number Required: None noted on regulations

Mounting Location: Roof or top mount

Minimum Candle Power: None noted on regulations

Minimum Sight Distance: None noted on regulations

Use of Lights: During load movement

Degree of Visibility: Front and rear

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: None noted on regulations

Size of Flags: None noted on regulations

Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: Two-way communication required

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Vehicle Requirements:

Must be current licensed motor vehicles, motorcycles not acceptable.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

Driver may act as a flag person

Warning signs:

Preferred Wording: "WIDE LONG LOAD" or "WIDE LOAD AHEAD" accepted

- Color: Yellow background
- Size: None noted on regulations
- Letters: Black
- Size of Letters: 12" high with 1 3/8" brush stroke

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing or revolving
- Acceptable Color: Amber
- Size of Lights: 4" minimum diameter
- Number Required: (2) Two minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 500 Feet
- Use of Lights: During load movement
- Degree of Visibility: Front and rear
- Headlight/Taillights: Turned on during load movement



Flags Required on Escort Vehicle:

- Color of Flags: Red or orange
- Size of Flags: 12" square
- Mounting Locations: On each side of sign, front and rear

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Vehicle Requirements:

Weigh more than 2,000 pounds with (GVW) less than 10,000 pounds.

Company Requirements and or Licenses:

Identification signs or placards showing name of company, owner, or driver company phone number sign must be 8 by 12.

Driver Requirements and or Licenses:

Driver may act as a flag person

Warning signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 7' wide by 18" high
- Letters: Black
- Size of Letters: 10" high with 1 1/2" brush stroke

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Rotating or strobe
- Acceptable Color: Amber
- Size of Lights: 4" minimum diameter *9" diameter by 9" high
- Number Required: (4) minimum, *(1) One minimum
- Mounting Location: None noted on regulations
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 500'
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or fluorescent orange
- Size of Flags: 18"
- Mounting Locations: 40 to 70 degree angle on roof rack

Two-Way Communication Radio:

- Type: Two-way communication or other acceptable radios
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads of 15'0" and greater

Safety Equipment Required:

1. (2) 5 pound fire extinguishers
2. Stop/Go paddle (18" with 6" letters)
3. Safety orange vest, shirt, or jacket
4. Red hand-held flag (18" in size)
5. Hard hat
6. Reflecting triangles or 18" traffic cones
7. (2) "oversize load" banners black and yellow



Revision Date: 2019

Vehicle Requirements:

Single unit with (GVW) not less than 1,000 pounds no more than 10,000 pounds

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

Driver may act as a flag person -Starting September 1, 2019.

Warning signs:

Preferred Wording: "OVERSIZE LOAD" or "WIDE LOAD" acceptable

Color: Yellow background

Size: 5' to 7' long by 12" high cannot exceed 18" in height

Letters: Black

Size of Letters: 8" to 10" high with 1.4" brush stroke cannot exceed 10" in height

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: (2) Flashing or (1) rotating

Acceptable Color: Amber (Starting September 1, 2019, escort flag vehicles may be equipped with alternating or flashing blue and amber lights)

Size of Lights: 8" minimum diameter

Number Required: (1) One minimum

Mounting Location: Roof or top mount

Minimum Candle Power: None noted on regulations

Minimum Sight Distance: None noted on regulations

Use of Lights: During load movement

Degree of Visibility: 360 Degree

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Red or orange fluorescent material

Size of Flags: 12" square

Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: Two-way communication required

Range: None noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 17'

Safety Equipment Required:

None noted on regulations



Vehicle Requirements:

Minimum wheelbase of 95” and a maximum of 12,000 lbs. GVW cannot tow trailers or other vehicles, no passengers under the age of 16.

Company Requirements and or Licenses:

Automobile Liability Insurance in the amount of \$750,000. Must be enforced during all times of providing Pilot Escort Services. See R912-9 for more specific requirements relating to insurance issues.

Driver Requirements and or Licenses:

Driver may act as a flag-person, minimum of 18 years of age and have a valid driver’s license. Utah drivers must complete the Utah Pilot/Escort Certification Course. Non-Utah drivers must complete either the Utah course or a course that meets the “Pilot Car Driver Best Practices Guidelines” as outlined by the CVSA, FHWA, & SC&RA released in Sept. 2004. Utah does not honor Kansas Superload Certification, Arizona or New York State Certification at the time of this publication.

Warning signs:

- Preferred Wording: “OVERSIZE LOAD” required
- Color: Yellow
- Size: Minimum 5’ wide by 10” high
- Letters: Black
- Size of Letters: Minimum 8” high with 1” brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Not Acceptable
 - Rear Bumper: Not Acceptable
 - Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. May not have any equipment restricted to Law Enforcement vehicles.

Warning Lights:

- Acceptable Types: Flashing, revolving, or oscillating
- Acceptable Color: Amber
- Size of Lights: 6” minimum diameter, flash 60 times per minute
- Number Required: (2) Two minimum, Light Bars also allowed
- Mounting Location: Each side of sign individual lights, or below/above sign lightbar
- Minimum Candle Power: AAMVA approved
- Minimum Sight Distance: None noted on regulations
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: None noted on regulations
- Size of Flags: None noted on regulations
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: Two-way compatible communication required
- Range: One half mile
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: 16’0” must be Non-Conductive, Non-Destructive and frangible/flexible

Safety Equipment Required:

- | | |
|--|--|
| 1. (3) 18” Orange traffic cones | 9. Height pole for loads exceeding 16’ |
| 2. 18” or 24” Stop/Slow paddle (reflective for nighttime operations) | 10. Fire Extinguisher |
| 3. (9) Reflective triangles or reflective cones | 11. Handheld 2-way communication radio |
| 4. (8) Red burning fuses or approved alt. | 12. Six inch red/orange traffic cone for flashlight
(or a traffic wand) |
| 5. Spare tire, jack, and lug wrench | 13. First Aid Kit |
| 6. (1) 7’x18” Oversize Load sign for load | 14. Flashlight with 1.5” lens width |
| 7. Class 2 Orange Vest for daytime (Class 3 for nighttime operation) | |
| 8. Orange Hard Hat | |



Vehicle Requirements:

Revision Date: July 2011

At least the size of a compact size car or larger, must maintain visual contact with load.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning Signs:

- Preferred Wording: "OVERSIZE LOAD" required
- Color: Yellow background
- Size: 5' long by 12" high
- Letters: Black
- Size of Letters: 10" high with 1.4" brush stroke
- Acceptable Mounting Locations of Signs
 - Front Bumper: Acceptable
 - Rear Bumper: Acceptable
 - Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing
- Acceptable Color: Amber
- Size of Lights: None noted on regulations
- Number Required: (1) One minimum
- Mounting Location: Above highest point of vehicle
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: None noted on regulations
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: None noted on regulations

Flags Required on Escort Vehicle:

- Color of Flags: None noted on regulations
- Size of Flags: None noted on regulations
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Vehicle Requirements:

Revision Date: October 2010

Shall be a truck not less than 1/2 ton rated load capacity, but no more than 17,000 GVRW or passenger vehicle of not less than 2,000 GVR. Shall not be confused with law-enforcement or safety assistance vehicles. Not permitted to pull trailers while escorting

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

MUST BE CERTIFIED REGARDLESS OF RESIDENCY:SC&RA APPROVED. Contact Virginia Transportation Safety Department for further information: (804) 367-6236. 18 years of age minimum, valid driver’s license. May act as flag person.

Warning signs:

Preferred Wording: “OVERSIZE LOAD” or “WIDE LOAD” or “OVERWEIGHT LOAD” required

- Color: Yellow background
- Size: None noted on regulations
- Letters: Black
- Size of Letters: 8” high with 1-1/4 inch brush stroke

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Must be visible from side at a 45 Degree angle.

Warning Lights:

- Acceptable Types: Rotating or strobe
- Acceptable Color: Amber
- Size of Lights: 5” diameter 4” lens height
- Number Required: (1) One minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 500’ during normal sunlight
- Use of Lights: During load movement
- Degree of Visibility: 360 Degree
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red
- Size of Flags: 18” square
- Mounting Locations: All four corners

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: 15’

Safety Equipment Required:

1. (1) First Aid Kit
2. (1) Type BC or ABC Fire Extinguisher 5 pounds or greater
3. Reflective triangles or road flares
4. (1) Hand held Red Flag
5. (1) Red vest or jacket Type ANSI II or III
6. (1) Stop paddle



Vehicle Requirements:

Revision Date: Not noted

All over-dimensional loads that require escort/pilot cars must be obtained by calling 282-2184 or 576-6730.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

Preferred Wording: None noted on regulations
Color: None noted on regulations
Size: None noted on regulations

Letters: None noted on regulations

Size of Letters: None noted on regulations

Acceptable Mounting Locations of Signs

Front Bumper: None noted on regulations

Rear Bumper: None noted on regulations

Roof or Top Mount: None noted on regulations

Other Restrictions and or Requirements:

None noted on regulations

Warning Lights:

Acceptable Types: None noted on regulations
Acceptable Color: None noted on regulations
Size of Lights: None noted on regulations
Number Required: None noted on regulations
Mounting Location: None noted on regulations
Minimum Candle Power: None noted on regulations
Minimum Sight Distance: None noted on regulations
Use of Lights: None noted on regulations
Degree of Visibility: None noted on regulations
Headlight/Taillights: None noted on regulations

Flags Required on Escort Vehicle:

Color of Flags: None noted on regulations
Size of Flags: None noted on regulations
Mounting Locations: None noted on regulations

Two-Way Communication Radio:

Type: None noted on regulations
Range: None noted on regulations
Use: None noted on regulations

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: None noted on regulations

Safety Equipment Required:

None noted on regulations



Revision Date: July 2004

Vehicle Requirements:

Single unit passenger car including passenger van or two-axle truck. The GVW can't exceed 14,000 lbs. body width must be a minimum of 60" but no more than 102". Side view mirrors are required on the left and right side of the vehicle.

Company Requirements and or Licenses:

Minimum insurance, public liability in the amounts of \$100,000 for bodily injury, \$300,000 for bodily injury for two or more persons, \$50,000 for property damage. An original signed permit must be carried in the power vehicle at all times.

Driver Requirements and or Licenses:

18 years of age minimum, obtain Washington State Pilot/Escort Certification or have a Certification from an approved State Program. Washington State does not accept Virginia, Colorado, or New York Certification.

Warning signs:

Preferred Wording:	"OVERSIZE LOAD" required
Color:	Yellow background
Size:	5' long by 10" high
Letters:	Black
Size of Letters:	8" high with 1" brush stroke

Acceptable Mounting Locations of Signs

Front Bumper:	Not Acceptable
Rear Bumper:	Not Acceptable
Roof or Top Mount:	Acceptable, 60" from sign to roadway

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use. Clean and visible from a minimum distance of 500'

Warning Lights:

Acceptable Types:	Flashing or *rotating
Acceptable Color:	Amber
Size of Lights:	Must meet SAE-J-595-B
Number Required:	(2) Two minimum or *(1) One minimum
Mounting Location:	Roof or top mount
Minimum Candle Power:	None noted on regulations
Minimum Sight Distance:	500' during normal sunlight
Use of Lights:	During load movement
Degree of Visibility:	Front and rear
Headlight/Taillights:	Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags:	None noted on regulations
Size of Flags:	None noted on regulations
Mounting Locations:	None noted on regulations

Two-Way Communication Radio:

Type:	Two-way communication required
Range:	½ mile minimum
Use:	All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of:	Loads exceeding 14' 6" (Height pole must be mounted on the front of the lead vehicle, And must be extended 3-6" above max height of over-dimensional load.)
-----------------------------	---

Safety Equipment Required:

1. 18" Stop/Slow paddle
2. (3) bi-directional reflective triangles
3. 5 pound BC fire extinguisher
4. Fluorescent yellow-green, orange-red, red class 2 safety garment
5. Highly visible hard hat
6. First-Aid kit with easy access
7. Flashlight with red nose cone



Vehicle Requirements:

Must weigh more than 2,000 pounds have a (GVW) less than 26,000 pounds

Company Requirements and or Licenses:

Identification signs or placards showing, name of company and telephone number 8" by 12"

Driver Requirements and or Licenses:

May act as a flag person if necessary

Warning signs:

Preferred Wording: "OVERSIZE LOAD" required
Color: Yellow background
Size: 5' long by 12" tall
Letters: Black
Size of Letters: 10" high with 1 1/2" brush strokes

Acceptable Mounting Locations of Signs

Front Bumper: Acceptable
Rear Bumper: Acceptable
Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Rotating or strobe
Acceptable Color: Amber
Size of Lights: None noted on regulations
Number Required: (2) Two minimum
Mounting Location: 6' above roadway
Minimum Candle Power: None noted on regulations
Minimum Sight Distance: 500'
Use of Lights: During load movement
Degree of Visibility: 360 Degree
Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Red or safety orange
Size of Flags: 18" square
Mounting Locations: Roof rack or all four corners of vehicle

Two-Way Communication Radio:

Type: Two-way communication required
Range: None noted on regulations
Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of: All loads exceeding 15'0"

Safety Equipment Required:

1. (2) 5 pound fire extinguisher (type A-B-C)
2. Stop/Slow sign not less than 18" with 6" letters
3. Safety orange vest, shirt, or jacket
4. Red hand held sign 18"
5. (2) oversize load banners
6. (3) reflective triangles or 18" traffic cones



Vehicle Requirements:

Passenger automobile or light truck with a GVW of not more than 16,000 lbs. Designed so as to afford clear and unobstructed view both front and rear.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

Must check load permit and observe all restrictions and conditions, 18 years of age minimum. Valid operator license for Wisconsin or base plate state. May act as a flag person, certification is required. Now accepting certification from states that have an 8 hour+ training program.

Warning signs:

Preferred Wording: "OVERSIZE LOAD" required and clearly visible at all times

- Color: Yellow/Amber background
- Size: 5' wide by 12" high
- Letters: Black
- Size of Letters: 10" high with 1 1/2" brush strokes

Acceptable Mounting Locations of Signs

- Front Bumper: Not Acceptable
- Rear Bumper: Not Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Strobe, flash, pulse, or rotate
- Acceptable Color: Amber
- Size of Lights: None noted on regulations
- Number Required: (2) Two minimum
- Mounting Location: Roof or top mount and as far apart as possible
- Minimum Candle Power: 30 to 120 flashes per minute
- Minimum Sight Distance: 500' during all conditions
- Use of Lights: During load movement
- Degree of Visibility: 360 degrees
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or orange
- Size of Flags: 18" square and on a staff
- Mounting Locations: Front bumper corners

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: In good working condition
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: None noted on regulations

Safety Equipment Required:

- 1. (1) 18" red hand held flag



Vehicle Requirements:

Licensed single motor vehicles, no motorcycles allowed. Left outside rearview mirror required

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

Preferred Wording:	“OVERSIZE LOAD” required clean and fully visible
Color:	Yellow background
Size:	5’ long by 10” high
Letters:	Black
Size of Letters:	8” high with 1” brush strokes

Acceptable Mounting Locations of Signs

Front Bumper:	Acceptable
Rear Bumper:	Acceptable
Roof or Top Mount:	Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types:	Revolving, strobe or two way flashing minimum
Acceptable Color:	Amber
Size of Lights:	4” minimum diameter
Number Required:	(1) One minimum or (2) flashing minimum
Mounting Location:	Roof or top mount
Minimum Candle Power:	None noted on regulations
Minimum Sight Distance:	500’ from rear of vehicle in all conditions
Use of Lights:	During load movement
Degree of Visibility:	Front and rear
Headlight/Taillights:	Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags:	Red or fluorescent orange
Size of Flags:	12” square and on a staff
Mounting Locations:	Mounted on each side of the Oversize Load sign

Two-Way Communication Radio:

Type:	Two-way communication required
Range:	None noted on regulations
Use:	All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of:	None noted on regulations
-----------------------------	---------------------------

Safety Equipment Required:

1. Emergency triangles
2. Extra Oversize Load Sign
3. Extra flags
4. 5 lb. BC Fire extinguisher

Rules and Regulations for:

Alberta


British Columbia

Manitoba

Northwest Territories

Saskatchewan

Yukon Territory

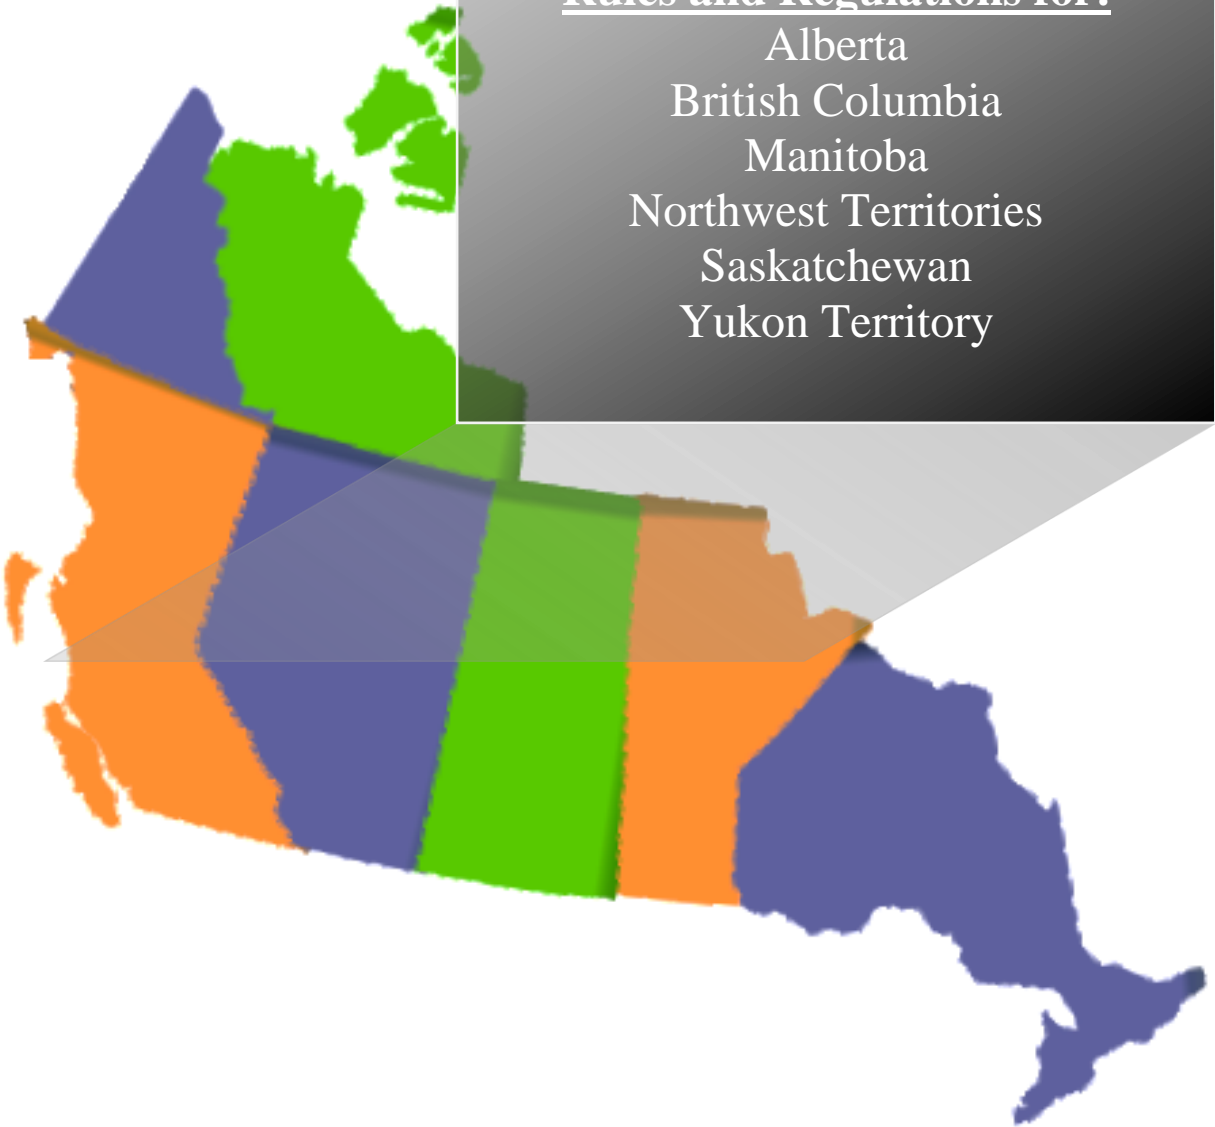

Vehicle Requirements:

The escort vehicle may not tow any trailer or other vehicle. The escort vehicle may not carry any load that in any manner obscures any lights or signs that the vehicle is required to be equipped with.

Company Requirements and or Licenses:

Vehicle registrations, copy proof of commercial insurance, name and phone number of business or registered owner 8” by 12” min. commercial license plate from home jurisdiction.

Driver Requirements and or Licenses:

Must maintain adequate distance in front of or behind the unit in order to warn approaching vehicles of the over dimensional load. Must have a valid driver license.

Warning signs:

Preferred Wording: “D” required clean and fully visible
 SIGN- must be 4 inches thick, with a white plexi-glass background with red bars painted with transparent red paint. The letter “D” must be white in color and must be 20 centimeters high, Sign should be 30 Cm high by 245 cm long. Must contain 8 lights to light up box. See figure 1

Acceptable Mounting Locations of Signs

- Front Bumper: Not Acceptable
- Rear Bumper: Not Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Revolving, strobe or two way flashing minimum
- Acceptable Color: Amber
- Size of Lights: 4” minimum diameter
- Number Required: (1) One minimum or (2) flashing minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 500’ during all conditions
- Use of Lights: During load movement
- Degree of Visibility: Front and rear
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or orange
- Size of Flags: 16” by 16”
- Mounting Locations: None noted on regulations

Two-Way Communication Radio:


- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

- Required at load height of: Not allowed in the province of Alberta

Safety Equipment Required:

1. 3 approved warning devices (red flares, lamps, lanterns, reflectors, or warning triangles)
2. 3 warning flags for traffic marking
3. One warning flag per crew member for flagging
4. One reflective vest per crew member
5. One flashlight, equipped with signal tube per crew member

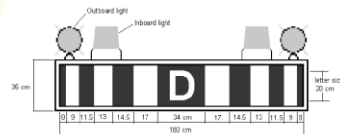



Revision Date: September 2011

Vehicle Requirements:

Vehicle shall be private passenger vehicle or single commercial vehicle with a gross weight not exceeding 5 500 kg.

Company Requirements and or Licenses:

None noted on regulations


Driver Requirements and or Licenses:

Must have a valid driver's license. Figure 1

Warning signs:

Preferred Wording: "D" required clean and fully visible

SIGN- must be 4 inches thick, with a white plexi-glass background with red bars painted with transparent red paint. The letter "D" must be white in color and must be 20 centimeters high, Sign should be 30 Cm high by 245 cm long. Must contain 8 lights to light up box. See figure 1

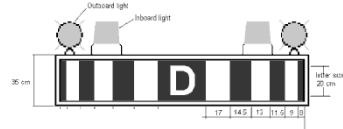

Acceptable Mounting Locations of Signs

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Sign must be removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Revolving, strobe or two way flashing minimum
- Acceptable Color: Amber
- Size of Lights: 4" minimum diameter
- Number Required: (1) One minimum or (2) flashing minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: None noted on regulations
- Minimum Sight Distance: 500' during all conditions
- Use of Lights: During load movement
- Degree of Visibility: Front and rear
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red
- Size of Flags: 30 cm square
- Mounting Locations: All four corners of the vehicle or load

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: None noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Required at load height of Not allowed in the province of British Columbia

Safety Equipment Required:

1. 3 approved warning devices
2. 3 warning flags for traffic marking
3. One warning flag per crew member for flagging
4. One reflective vest per crew member
5. One flashlight equipped with signal tube
6. Stop/Slow paddle min. 12" by 12"
7. Hard hat
8. (3) Flags on staff 16" by 16"
9. First aid kit
10. Hazard Warning kit
11. Fire Extinguisher 2 lb. Min
12. Switches to control pilot lighting
13. Flashlight with nose cone
14. (2) Extra dimensional signs
15. Reflective vest



Revision Date: December 1988

Vehicle Requirements:

The escort vehicle may not tow any trailer or other vehicle. The escort vehicle may not carry any load that in any manner obscures any lights or signs that the vehicle is required to be equipped with.

Company Requirements and or Licenses:

Vehicle registration, copy proof of commercial insurance, name and phone number of business or registered owner 8" by 12" min., commercial license plate from home jurisdiction. Figure 1

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

Preferred Wording: "D" required clean and fully visible
SIGN - must be 3 millimeters thick, with a white plexi-glass background with red bars painted with transparent red paint. The letter "D" must be white in color and must be 20 centimeters high, Sign should be 30 cm high by 245 cm long. See figure 1

Acceptable Mounting Locations of Signs:

- Front Bumper: Acceptable
- Rear Bumper: Acceptable
- Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Revolving, strobe or two way flashing minimum
- Acceptable Color: Amber
- Size of Light(s): 4" minimum diameter
- Number Required: (1) One minimum or (2) flashing minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: 500' during all conditions
- Use of Lights: During load movement
- Degree of Visibility: Front and rear 1 km
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red or fluorescent orange
- Size of Flags: 12" Square and on a staff
- Mounting Locations: 45 Degree angle on each side of sign

Two-Way Communication Radio:


- Type: Two-way communication required
- Range: Not noted on regulations
- Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Not allowed in the Province of Manitoba

Safety Equipment Required:

1. Stop/Slow paddle
2. Red fluorescent vest
3. Flashlight equipped w/single tube
4. Fire extinguisher of an approved design
5. Flares, lanterns, or reflectors which are visible at a distance of 150 meters in normal conditions

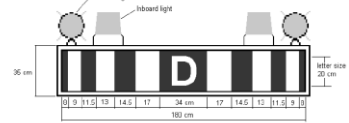

Vehicle Requirements:

None noted on regulations

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

Preferred Wording: "OVERSIZE" and "LOAD AHEAD"

Must be visible to the driver of vehicles approaching from front and behind. Warning sign made of stiff, flat, or flexible weather proof material.

Acceptable Mounting Locations of Signs:

Front Bumper: Not Acceptable

Rear Bumper: Not Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Rotating or Flashing

Acceptable Color: Yellow

Size of Light(s): 4" minimum diameter

Number Required: (1) One minimum or (2) flashing minimum

Mounting Location: Roof or top mount

Minimum Candle Power: Incandescent lights 55 watts LED 24 watts

Minimum Sight Distance: 500' during all conditions

Use of Lights: During load movement

Degree of Visibility: Front and rear

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Not noted

Size of Flags: Not noted

Mounting Locations: Not noted

Two-Way Communication Radio:

Type: Two-way communication required

Range: Not noted on regulations

Use: All times of load movement

Height Pole, Non-Destructive and Non-Conductive Type:

Not allowed in Northwest Territories

Safety Equipment Required:

1. 1 reflective vest per crew member AS 1906.4



Vehicle Requirements:

The vehicle shall not have more than 2 axles. The wheelbase length should not be less than 2.65 meters.

Company Requirements and or Licenses:

The escort vehicle(s) shall be operated by a fully (unrestricted) licensed driver of not less than 18 years of age with at least two years' experience and a valid driver's licence.

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

Preferred Wording: "D" required clean and fully visible or "OVERSIZE LOAD"

SIGN - must be 3 millimeters thick, with a white plexi-glass background with red bars painted with transparent red paint. The letter "D" must be white in color and must be 20

Centimeters high, Sign should be 30 cm high by 245 cm long. See figure 1. Oversize Load sign shall be in black on yellow background.

Acceptable Mounting Locations of Signs:

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Acceptable

Other Restrictions and or Requirements:

Removed, retracted, or covered when not in use.

Warning Lights:

- Acceptable Types: Flashing
- Acceptable Color: Amber
- Size of Light(s): 4" minimum diameter
- Number Required: (1) One minimum or (2) flashing minimum
- Mounting Location: Roof or top mount
- Minimum Candle Power: Not noted on regulations
- Minimum Sight Distance: 500' during all conditions
- Use of Lights: During load movement
- Degree of Visibility: 360 degree's
- Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

- Color of Flags: Red
- Size of Flags: 30 cm square
- Mounting Locations: All four corners of the vehicle or load

Two-Way Communication Radio:

- Type: Two-way communication required
- Range: Not noted on regulations
- Use: All times of load movement


Height Pole, Non-Destructive and Non-Conductive Type:

Not allowed in Ontario

Safety Equipment Required:

1. Fire extinguisher
2. (6) 18" Traffic cones and/or portable reflectors
3. Extra bulbs to maintain all lights.

Figure 1

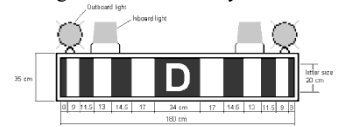



Revision Date: June 2007

Vehicle Requirements:

A private passenger vehicle or truck of a registered vehicle weight not to exceed 13,200 pounds.

Company Requirements and or Licenses:

None noted on regulations

Driver Requirements and or Licenses:

None noted on regulations

Warning signs:

Preferred Wording: "D" required clean and fully visible

SIGN - must be 3 millimeters thick, with a white plexi-glass background with red bars painted with transparent red paint. The letter "D" must be white in color and must be 20 centimeters high. Sign should be 30 cm high by 245 cm long. See figure 1

Other Restrictions and or Requirements:

Removed, retracted, or covered when not in use.

Acceptable Signs: "WIDE LOAD" or "LONG LOAD"

Color: Yellow Background

Size: 30 cm by 245 cm

Letters: BLACK

Size of Letters: 20 cm high

Acceptable Mounting Locations of Signs:

Front Bumper: Acceptable

Rear Bumper: Acceptable

Roof or Top Mount: Not Acceptable

Other Restrictions and or Requirements:

Removed, retracted, or covered when not in use.

Warning Lights:

Acceptable Types: Revolving, strobe or two way flashing minimum

Acceptable Color: Amber

Size of Light(s): 4" minimum diameter

Number Required: (1) One minimum

Mounting Location: Roof or top mount

Minimum Candle Power: Not noted on regulations

Minimum Sight Distance: 328' in normal daylight

Use of Lights: During load movement only

Degree of Visibility: Front and rear

Headlight/Taillights: Turned on during load movement

Flags Required on Escort Vehicle:

Color of Flags: Red

Size of Flags: 12" Square and on a staff

Mounting Locations: All corners or projections of vehicle

Two-Way Communication Radio:

Type: Two-way communication required

Range: Not noted on regulations


Use: All times of load movement when two or more escorts are used

Height Pole, Non-Destructive and Non-Conductive Type:

Not allowed in the Yukon Territory

Safety Equipment Required:

None noted on regulations.

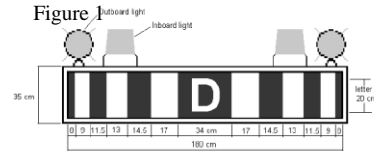

HOURS OF TRAVEL

The following reference list relates to the time of day that is allowed for over-dimensional loads to travel within the noted States. This information was extracted from the individual State Over-Dimensional Load Regulations and should only be used as a reference. Special provisions may be noted on a permit and should always be reviewed prior to load movement. Every effort is made to make sure that this information is accurate and concise at the time that this manual is published; however, changes to State Rules and Regulations can and may affect this information regarding accuracy.

Daytime travel beginning ½ hour BEFORE Sunrise and ending ½ hour AFTER Sunset:

Alabama	Illinois	Missouri	New Hampshire	Rhode Island	Washington
Alaska	Iowa	Maine	New York	South Dakota	Wyoming
California	Kansas	Massachusetts	Ohio	Texas	
Florida	*Kentucky	Michigan	Oklahoma	Utah	
Idaho		Nebraska	Oregon	Vermont	

*(Travel not permitted on Sunday)

Daytime travel beginning ½ hour AFTER Sunrise and ending ½ hour BEFORE Sunset:

Connecticut	Maryland	Washington D.C.
Georgia	Mississippi	Virginia

Daytime travel BEGINS at Sunrise and ENDS at Sunset:

Arizona	Minnesota	North Dakota	Wisconsin
Arkansas	Montana	Pennsylvania	Yukon Territory
Colorado	Nevada	South Carolina	North Carolina
Delaware	New Jersey	Tennessee	West Virginia
Indiana	New Mexico	Louisiana	

Nighttime travel allowance:

Utah: Loads may not exceed 14' wide and 14' high for nighttime travel

However, loads exceeding 12' wide will require pilot/escort vehicles – see www.utahmc.com for complete information.

Kentucky: Travel allowed 24-7 unless noted otherwise on the permit. Does not apply to mobile homes see

* for mobile home time travel.

California: Special permit is required to travel at nighttime in certain areas of California.

DISTANCE FROM LOAD

Preceding distance for front pilot car Following distance for rear pilot car

The following table should be used only as a reference. The noted information has been extracted from the individual State Rules and Regulations and is subject to change without notice. Every effort is made to verify the accuracy of this information prior to publishing this manual. It is highly recommended that for more specific information that you contact the individual State agencies.

Key

N/N = not noted on the regulations

** = pilot/escort driver can deviate from these distances if it is in the best interest of the public

STATE	FRONT CAR	REAR CAR	STATE	FRONT CAR	REAR CAR
Alabama	500'	500'	Nebraska	300'	300'
Alaska	800' - 1500'	400' - 600'	Nevada	300' - 1000'	100' - 1000'
Arizona	Shall not exceed 250' in city and 1500' on open hwy.		New Hampshire	N/N	N/N
Arkansas	200'	200'	New Jersey	N/N	N/N
California	N/N	N/N	New Mexico	N/N	N/N
Colorado	N/N	N/N	New York	N/N	N/N
Connecticut	N/N	N/N	North Carolina	N/N	N/N
Delaware	500' - 1000'	500' - 1000'	North Dakota	N/N	N/N
Florida	300'	300**	Ohio	500'	500'
Georgia	N/N	N/N	Oklahoma	Enough space to warn public in advance	
Idaho	1000' max	1000' max	Oregon	300' - 500'	300' - 500'
Illinois	300'	300'	Pennsylvania	Must maintain visual and radio contact	
Indiana	500'	300'	Rhode Island	N/N	N/N
Iowa	300'	300'	South Carolina	N/N	N/N
Kansas	300'	300'	South Dakota	N/N	N/N
Kentucky	300'	300'	Tennessee	N/N	N/N
Louisiana	N/N	N/N	Texas	N/N	N/N
Maine	N/N	N/N	Utah	N/N	N/N
Maryland	N/N	N/N	Vermont	N/N	N/N
Massachusetts	N/N	N/N	Virginia	500' - 1000'	500' - 100'
Michigan	N/N	N/N	Washington	800' - 1500'	800' - 1500'
Minnesota	300' - 700'	N/N	Washington D.C.	N/N	N/N
Mississippi	N/N	N/N	West Virginia	N/N	N/N
Missouri	300'	300'	Wisconsin	300' - 500'	300'
Montana	500' - 1000'	500' - 1000'	Wyoming	N/N	N/N

